

Box Header 2.54mm Straight Type






Specifications



Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 © Standard: PBT or Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

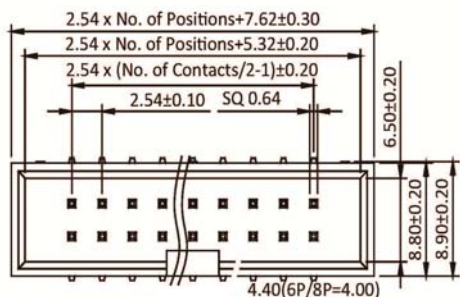


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

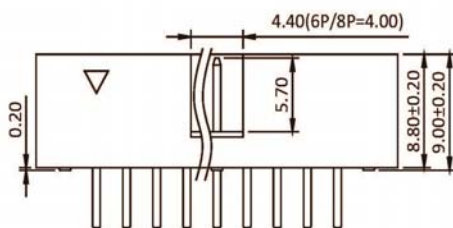

Part No.: BH1S-XX-L

ORDER INFORMATION

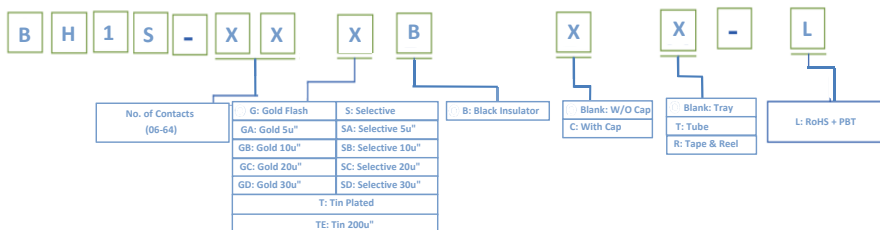

©: Standard Recommend