

CONNECTOR MANUFACTURERS

TOPTEK®



Box Header 2.00mm H=6.35mm Right Angle Type

Specifications



Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 © Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

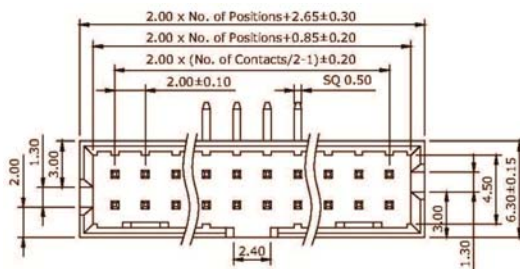


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

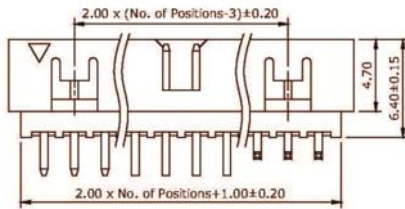

Part No.: BH2AR-XX-U

ORDER INFORMATION

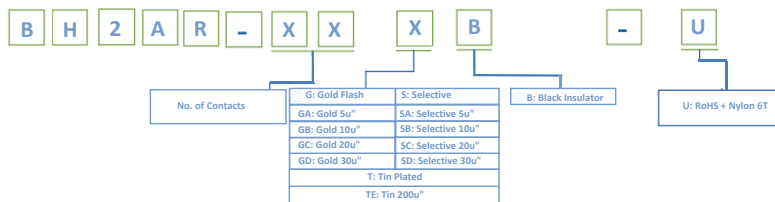

©: Standard Recommend

Box Header 2.0 mm



RoHS