

Box Header 2.0mm Elevated Straight Type



Specifications

Current Rate:2.0 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C





Material

Insulator:Polyester, UL 94V-0

© Standard: LCP


Terminal:Copper Alloy

Plating:Gold Plated

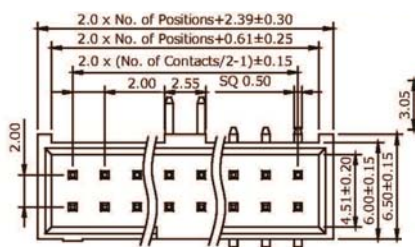

Part No.:BH2EGS-XX-U

ORDER INFORMATION

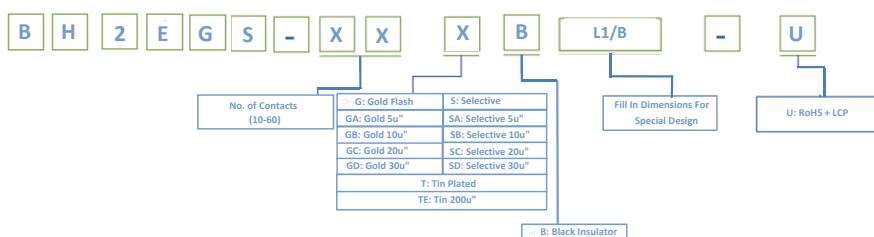

©:Standard Recommend