

# CONNECTOR MANUFACTURERS







## Box Header 2.0mm Elevated Straight Type

### Specifications

Current Rate: 2.0 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C


### Material

Insulator: Polyester, UL 94V-0  
 © Standard: Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

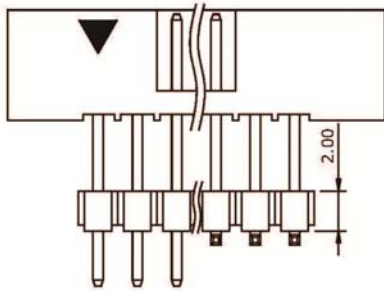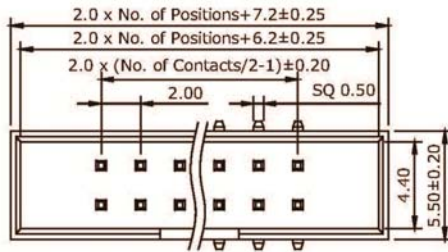

## ORDER INFORMATION

Part No.: BH2ES-XX-U

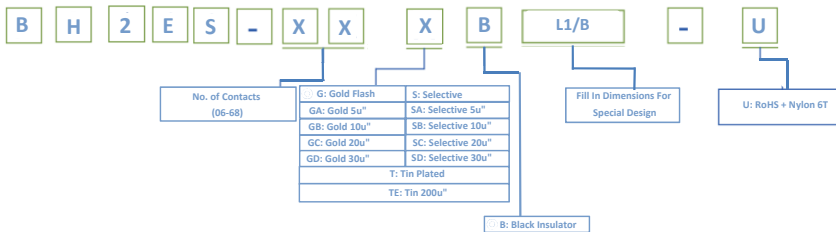

Box Header 2.0 mm



RoHS