

CONNECTOR MANUFACTURERS

TOPTEK®
SPECIALTY CONNECTOR MANUFACTURER

www.toptek-co.com

Box Header 2.0mm H=5.6mm Straight Type

Specifications

Current Rate: 2.0 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C




Material

Insulator: Polyester, UL 94V-0

◎ Standard: Nylon 6T


Terminal: Copper Alloy

Plating: Gold Plated

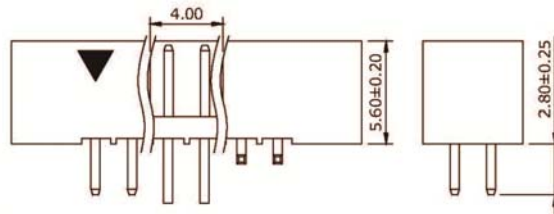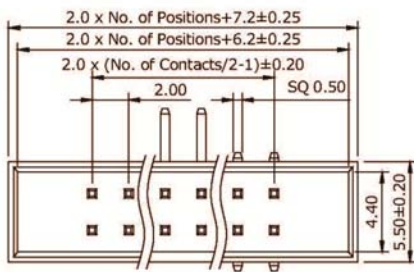

Part No.: BH2S-XX-U

ORDER INFORMATION

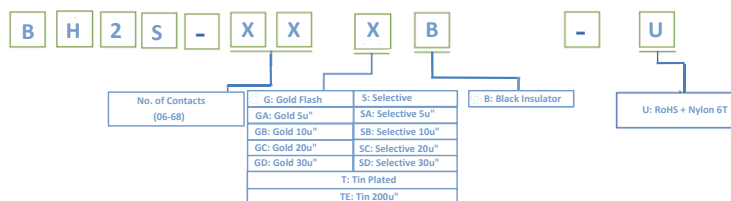

◎: Standard Recommend