

Box Header 1.27x1.27mm Straight Type for IDC








Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 © Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

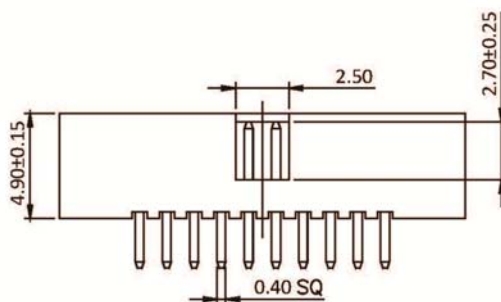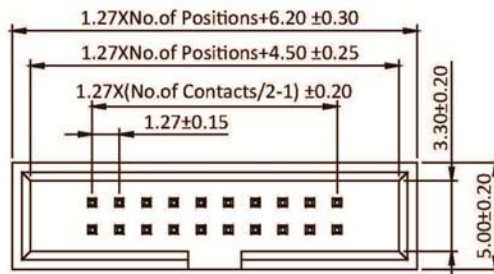

Part No.: BH3CS-XX-U

ORDER INFORMATION

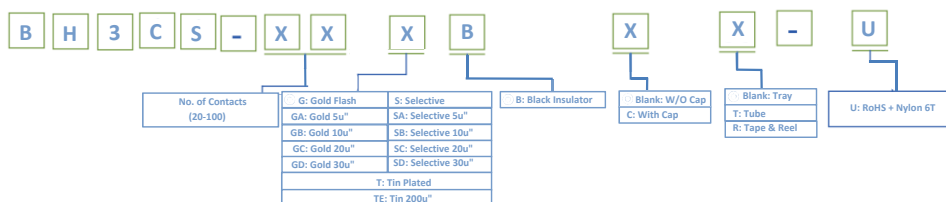

©: Standard Recommend