

# Box Header 1.27 mm



RoHS

## Box Header 1.27x1.27mm SMT Type






### Specifications

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C




### Material

Insulator:Polyester, UL 94V-0  
 © Standard: Nylon 6T & LCP  
 Terminal:Copper Alloy  
 Plating:Gold Plated

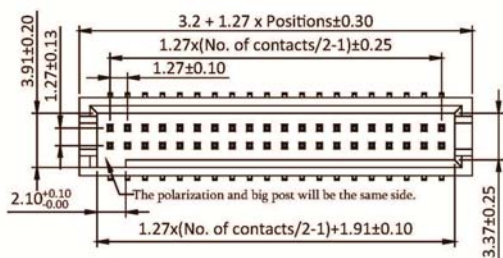


### Plastic Height

CODE	HEIGHT	CODE	HEIGHT
55	5.5	F4	15.4
58	5.8	F8	15.8
70	7.0	H5	17.5
86	8.6	I8	18.8
92	9.2		
96	9.6		
98	9.8		
A6	10.6		
A9	10.9		
B2	11.2		
B4	11.4		
B7	11.7		
C4	12.4		
E3	14.3		

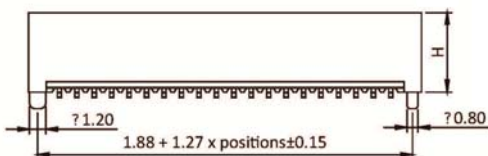

## ORDER INFORMATION

Part No.:BH3M-XX-U

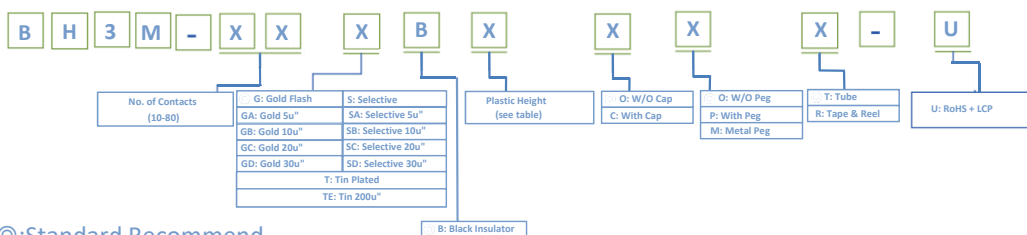

©:Standard Recommend

B: Black Insulator