

CONNECTOR MANUFACTURERS

TOPTEK®
SPECIALTY CONNECTOR MANUFACTURER

www.toptek-co.com

Box Header 1.27x1.27mm Straight Type

Specifications

Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C




Material

Insulator:Polyester, UL 94V-0

© Standard: Nylon 6T & LCP





Terminal:Copper Alloy

Plating:Gold Plated

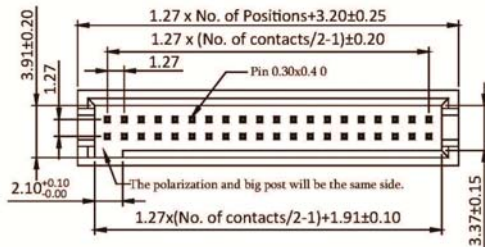


Plastic Height

CODE	HEIGHT	CODE	HEIGHT
86	8.6	F4	15.4
92	9.2	F8	15.8
96	9.6	H5	17.5
98	9.8	I8	18.8
A6	10.6		
A9	10.9		
B2	11.2		
B4	11.4		
B7	11.7		
C4	12.4		
E3	14.3		

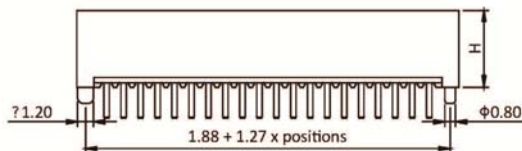

ORDER INFORMATION

Part No.:BH3S-XX-U

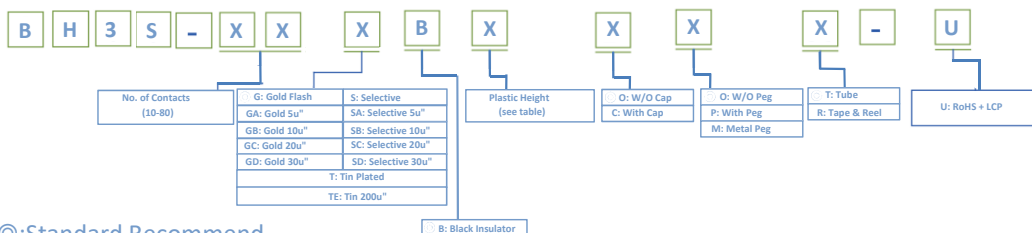

©:Standard Recommend

B: Black Insulator

www.toptek-co.com

info@toptek-co.com

Box Header 1.27 mm

Pb

RoHS