

Box Header 1.0mm H=2.85mm SMT Type







Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C


Material

Insulator:Polyester, UL 94V-0
 ◎ Standard: Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

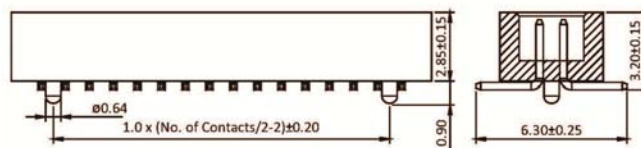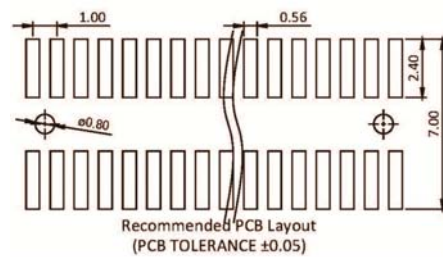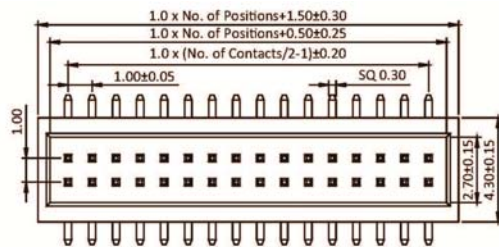

Part No.:BH5M28-XX-U

ORDER INFORMATION

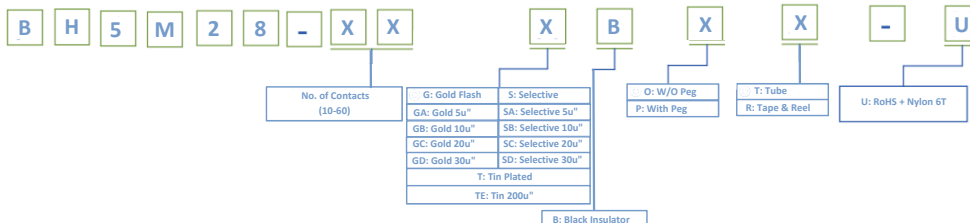

©:Standard Recommend