

# CONNECTOR MANUFACTURERS

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com






## Box Header 1.0mm H=6.90mm SMT Type

### Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C


### Material

Insulator:Polyester, UL 94V-0  
© Standard: Nylon 6T  
Terminal:Copper Alloy  
Plating:Gold Plated

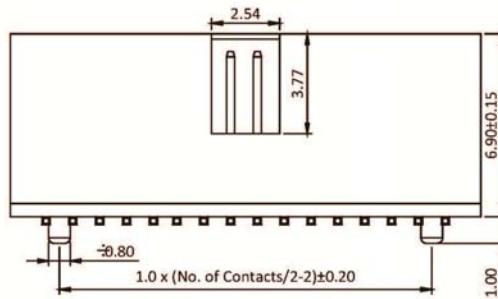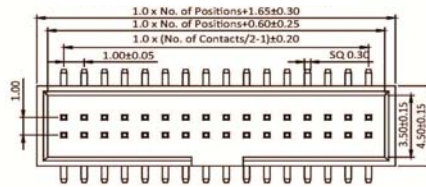

Part No.:BH5M69-XX-U

## ORDER INFORMATION

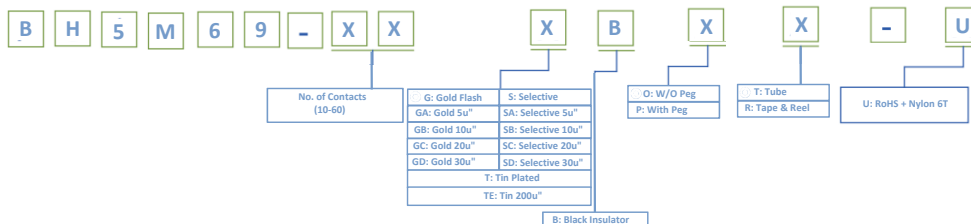

©:Standard Recommend