

CONNECTOR MANUFACTURERS



Box Header 1.27x1.27mm SMT Type

Specifications

Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C






Material

Insulator:Polyester, UL 94V-0

© Standard: Nylon 6T


Terminal:Copper Alloy

Plating:Gold Plated

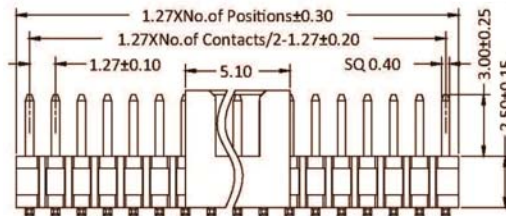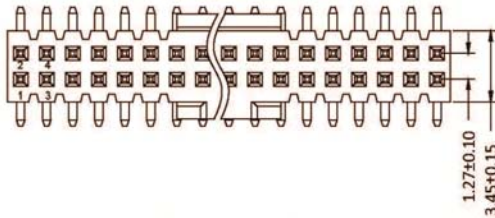

Part No.:BPH3M-XX-U

ORDER INFORMATION

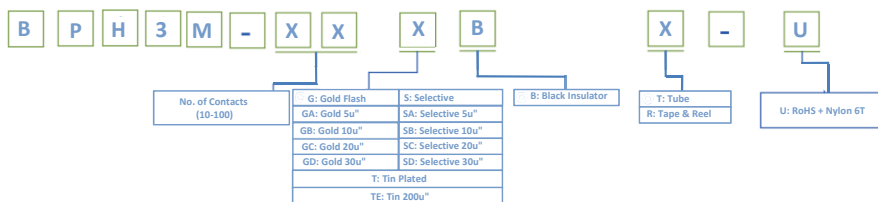

©:Standard Recommend

Box Header 1.27 mm



RoHS