
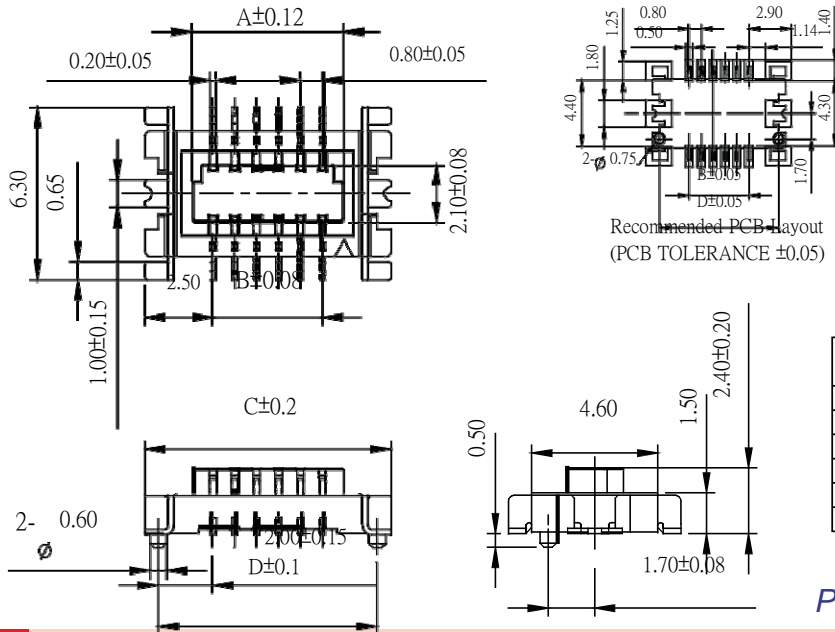


## Board To Board Male 0.8mm H=2.4mm

**Specifications**  
Current Rate:0.5 AMP  
Insulation Resistance:500MΩ Min.  
Contact Resistance:30mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-20°C to +105°C



**Material**  
Insulator:Polyester,UL 94V-0  
Standard:LCP  
Terminal:Copper Alloy  
Plating:Tin Plated



No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
10	4.74	3.20	8.20	7.20
12	5.54	4.00	9.00	8.00
14	6.34	4.80	9.80	8.80
16	7.14	5.60	10.60	9.60
20	8.74	7.20	12.20	11.20
30	12.74	11.20	16.20	15.20

Part No.:BTB08MI24-XX-U

## Board To Board Female 0.8mm H=2.9/3.6mm

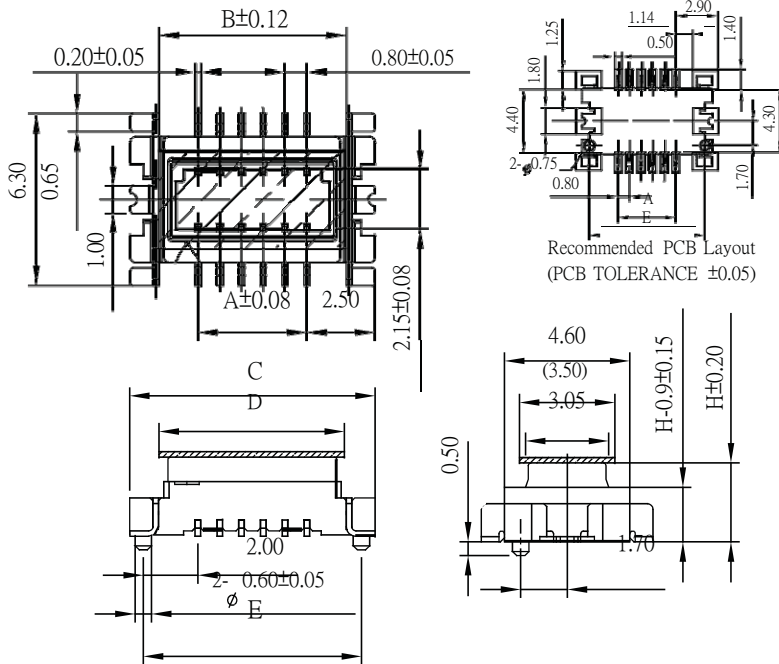

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
10	4.74	3.20	8.20	7.20
12	5.54	4.00	9.00	8.00
14	6.34	4.80	9.80	8.80
16	7.14	5.60	10.60	9.60
20	8.74	7.20	12.20	11.20
30	12.74	11.20	16.20	15.20

Part No.:BTB08FI 29/36-XX-U

## ORDER INFORMATION

