

Battery Holder Conn. Coin Type


Material

Insulator Material: Nylon 66+G.F, UL 94V-0


Terminal: Copper Alloy

Plated: Tin Plated

For CR2032

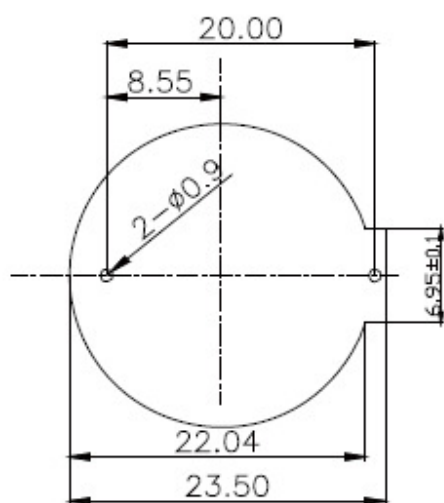

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

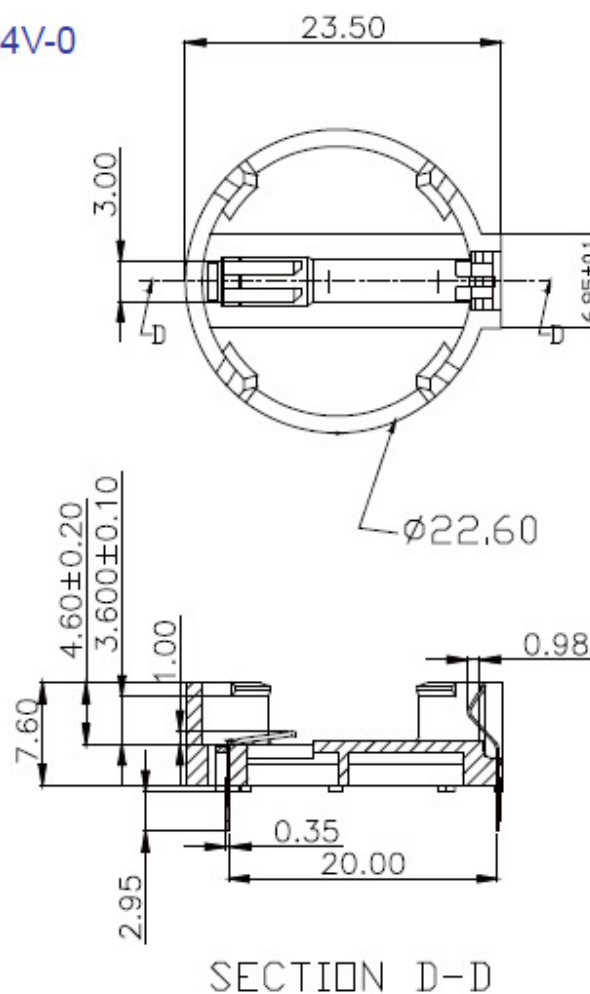

BTDE-2032TB-L

TOPTEK
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com