




FPC/FFC 1.0mm Non ZIF Dip Type Top Entry

SPECIFICATION


Current Rate:0.5 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-55°C to +85°C

MATERIAL



Insulator:Polyester,UL 94V-0
©Standard:Nylon 6T
Contact Pin:Copper Alloy
Contact Plating:Tin Plated

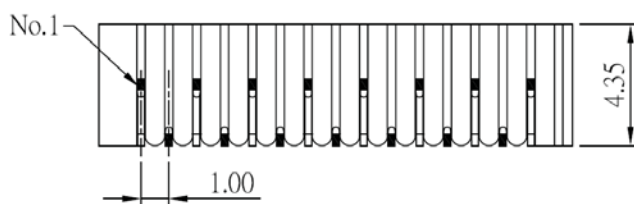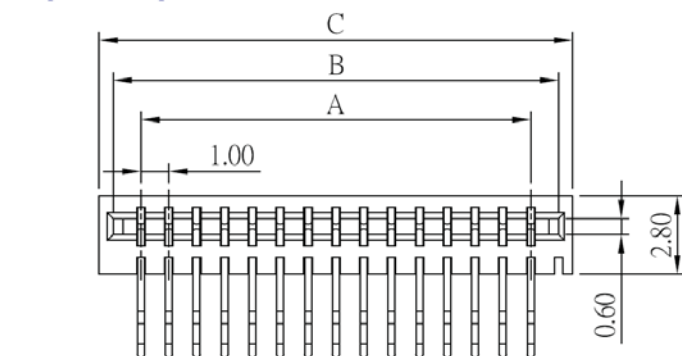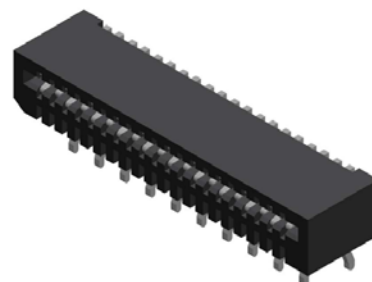


A Type

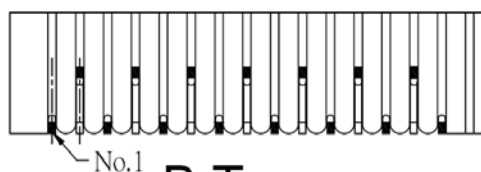


B Type



No. of Contacts	Dimensions			No. of Contacts	Dimensions		
	A	B	C		A	B	C
3	1.00	3.10	5.00	17	16.00	18.10	19.00
4	2.00	4.10	6.00	18	17.00	19.10	20.00
5	3.00	5.10	7.00	19	18.00	20.10	21.00
6	4.00	6.10	8.00	20	19.00	21.10	22.00
7	5.00	7.10	9.00	21	20.00	22.10	23.00
8	6.00	8.10	10.00	22	21.00	23.10	24.00
9	7.00	9.10	11.00	23	22.00	24.10	25.00
10	8.00	10.10	12.00	24	23.00	25.10	26.00
11	9.00	11.10	13.00	25	24.00	26.10	27.00
12	10.00	12.10	14.00	26	25.00	27.10	28.00
13	11.00	13.10	15.00	27	26.00	28.10	29.00
14	12.00	14.10	16.00	28	27.00	29.10	30.00
15	13.00	15.10	17.00	29	28.00	30.10	31.00
16	14.00	16.10	18.00	30	29.00	31.10	32.00

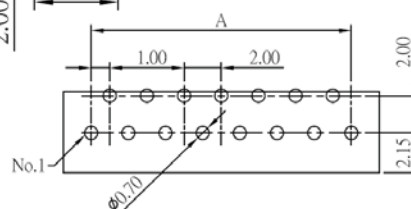

A Type

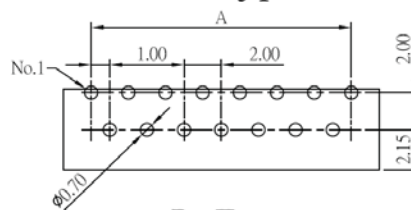

B Type

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

ORDER INFORMATION

