


DIN 41612 Short Body R Type Male

SPECIFICATION


Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Brass

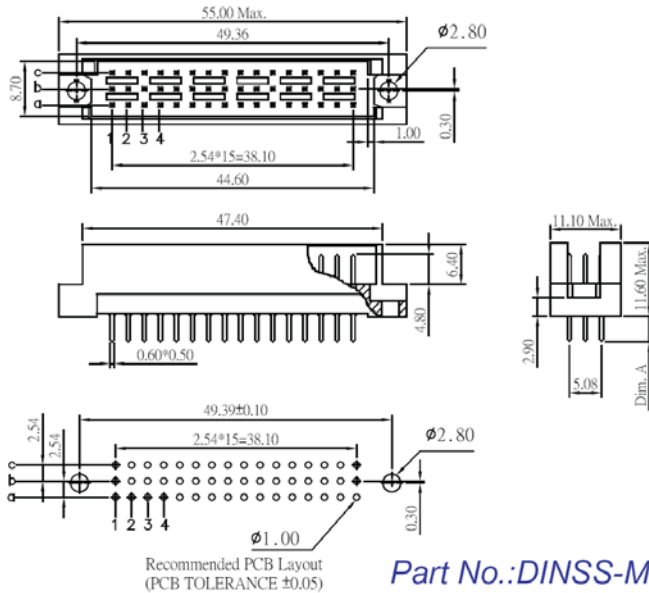

Part No.: *DINSS-M3XX-L*

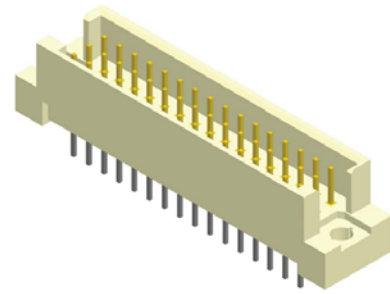

No. of Contacts	Rows/Positions With Contacts	Pitch
48	a+b+c	2.54mm
32A	a+c	
32B	a+b	
16	a	5.08mm Half-Loaded
24	a+b+c All Even No.	
16	a+c All Even No.	


DIN 41612 Short Body R Type Female

SPECIFICATION


Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

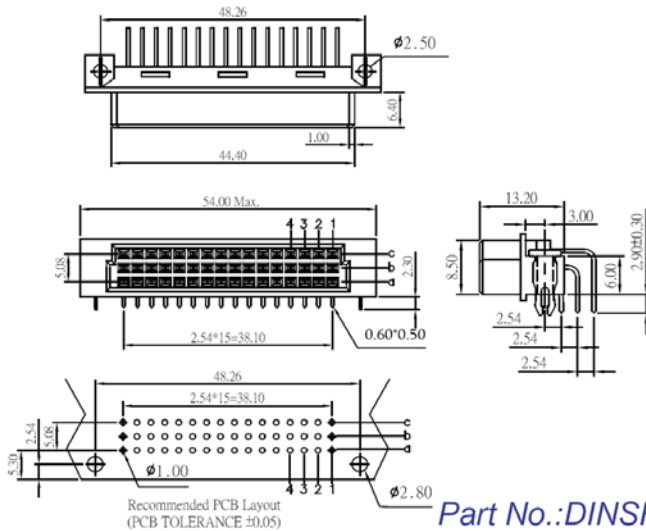

Part No.: *DINSR-F3XX-L*

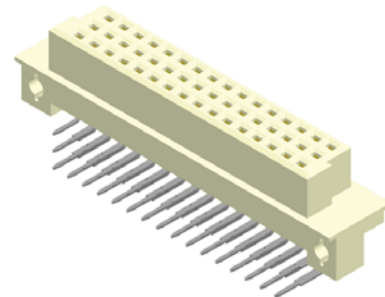

No. of Contacts	Rows/Positions With Contacts	Pitch
48	a+b+c	2.54mm
32A	a+c	
32B	a+b	
16	a	5.08mm Half-Loaded
24	a+b+c All Even No.	
16	a+c All Even No.	

ORDER INFORMATION

