

# CONNECTORS MANUFACTURER



## DIN 41612 Long Body IDC Type Female 3 Row 64 Pin

### SPECIFICATION

Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 30mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -55°C to +105°C

### MATERIAL

Insulator: Polyester, UL 94V-0  
 ©Standard: PBT  
 Contact Pin: Phosphor Bronze

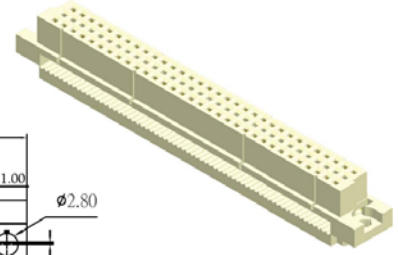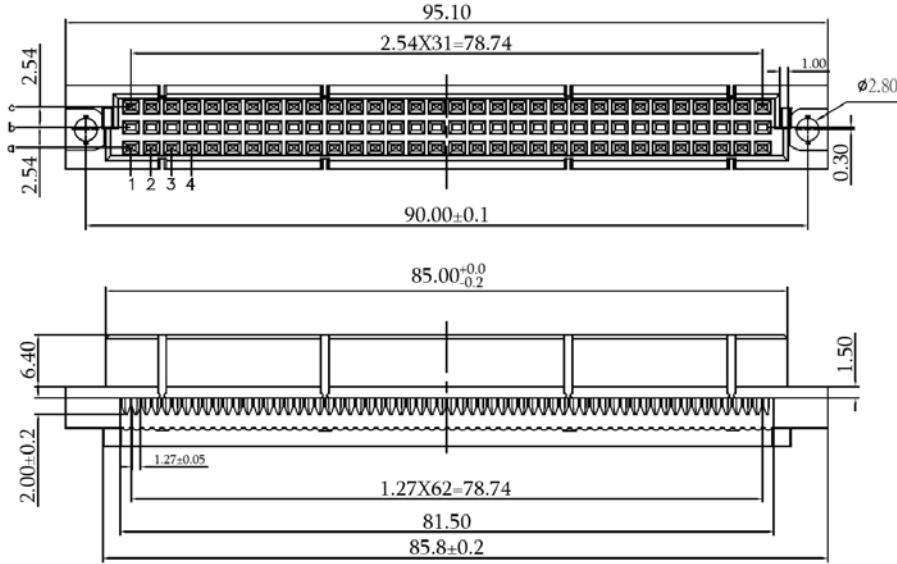

Part No.: DINLI-F364



## DIN 41612 Short Body IDC Type Female 3 Row 32 Pin

### SPECIFICATION

Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 30mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -55°C to +105°C

### MATERIAL

Insulator: Polyester, UL 94V-0  
 ©Standard: PBT  
 Contact Pin: Phosphor Bronze

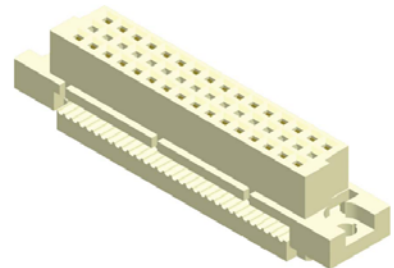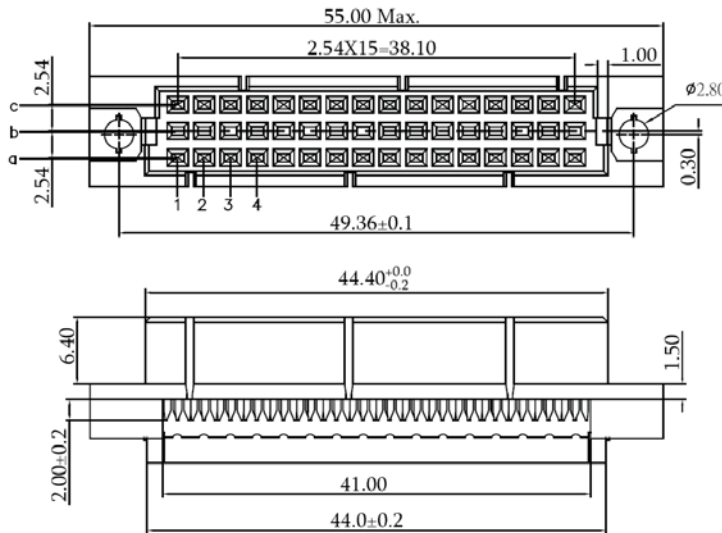

Part No.: DINSI-F332

## ORDER INFORMATION

