



DIN 41612 Long Body IDC Type Female 2 Row 64 Pin

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

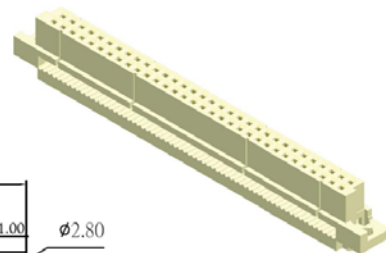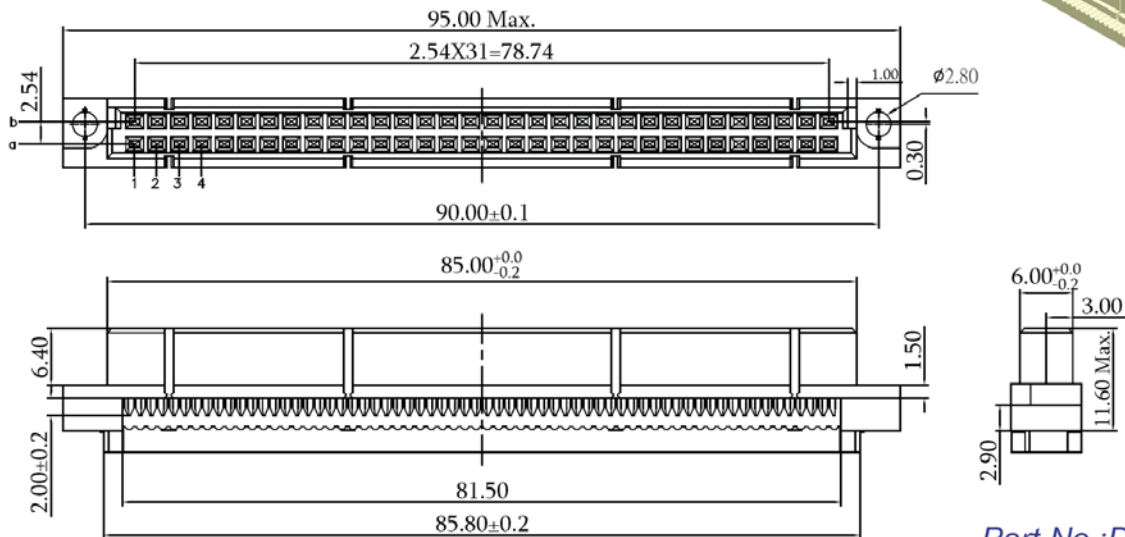

Part No.: DINLI-F264



DIN 41612 Short Body IDC Type Female 2 Row 32 Pin

SPECIFICATION

Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Contact Pin: Phosphor Bronze

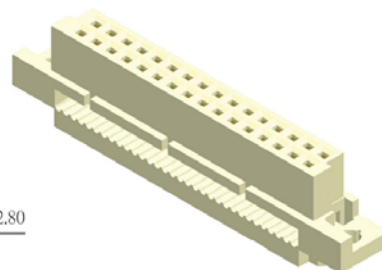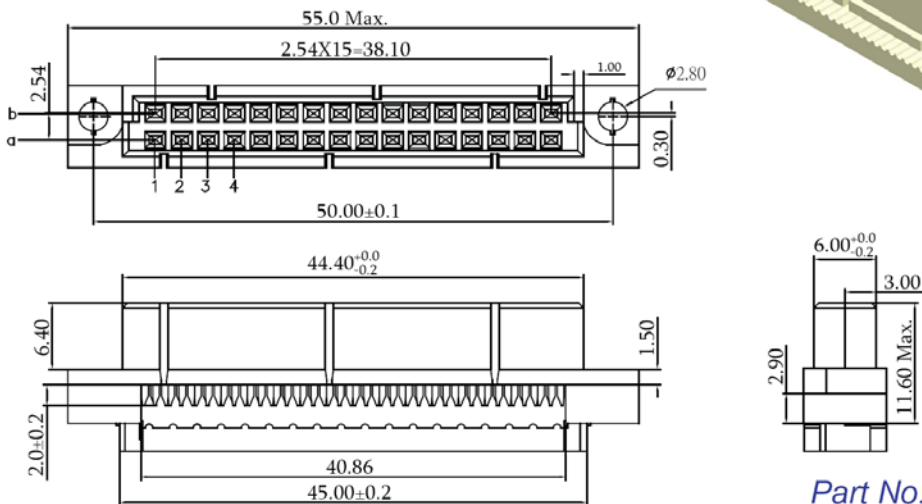

Part No.: DINSI-F232

ORDER INFORMATION

