

CONNECTOR MANUFACTURERS

TOPTEK®
CONNECTOR MANUFACTURERS



Ejector Header 2.54mm Straight Side Latch Type

Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C





Material

Insulator:Polyester, UL 94V-0

◎ Standard: PBT or Nylon 6T


Terminal:Copper Alloy

Plating:Gold Plated

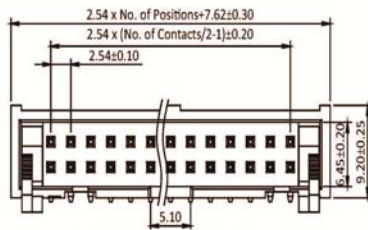

Part No.:EDH1SSL-XX-L

ORDER INFORMATION

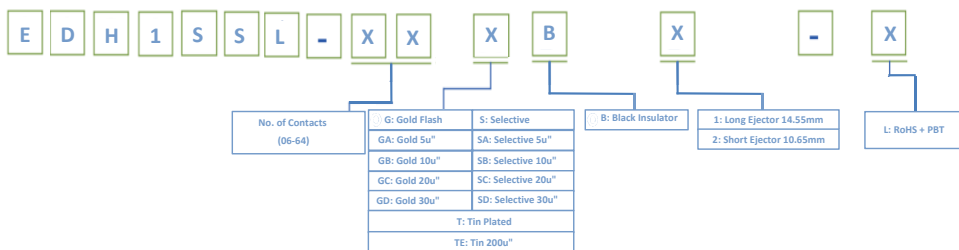

◎:Standard Recommend

Ejector Header 2.54 mm



ROHS