

CONNECTOR MANUFACTURERS

TOPTEK®
MEMBER OF THE TAIWAN ELECTRONIC COMPONENTS MANUFACTURERS ASSOCIATION

www.toptek-co.com

Ejector Header 1.27x1.27mm SMT Type

Specifications

Current Rate: 2 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C



Material

Insulator: Polyester, UL 94V-0


© Standard: Nylon 6T

Terminal: Copper Alloy

Plating: Gold Plated

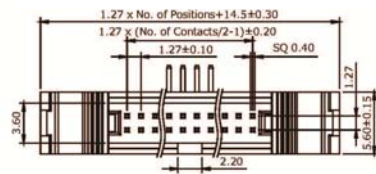


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

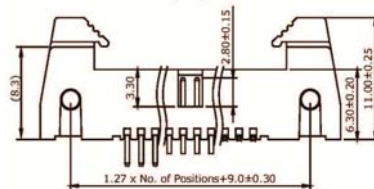

Part No.: EDH3M-XX-U

ORDER INFORMATION

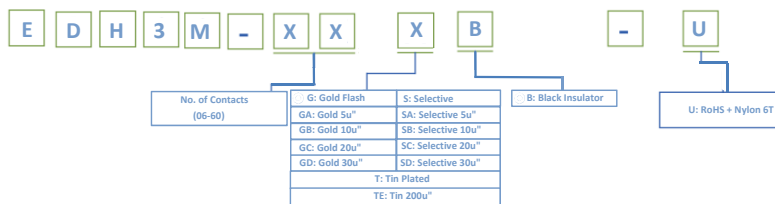

©: Standard Recommend