

CONNECTOR MANUFACTURERS

TOPTEK®
Advanced Electronic Interconnect

www.toptek-co.com




Ejector Header 1.27x1.27mm Straight Type

Specifications

Current Rate: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0
© Standard: Nylon 6T
Terminal: Copper Alloy
Plating: Gold Plated

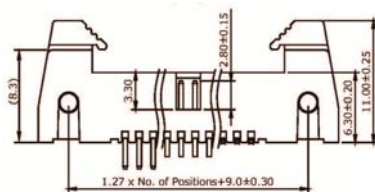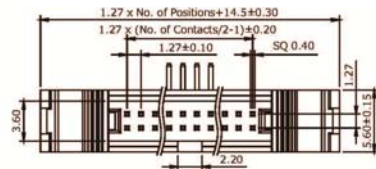

Part No.: EDH3S-XX-U

ORDER INFORMATION

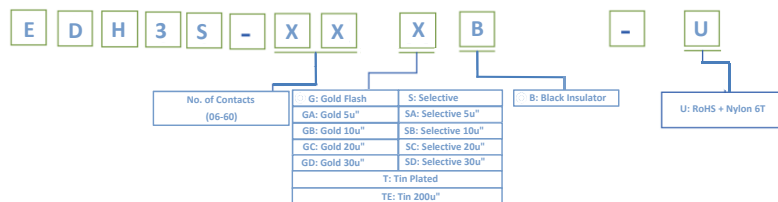

©: Standard Recommend