


IDC Socket 2.54mm

Specifications

Current Rate: 2.5 AMP
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0
Standard: PBT
Terminal: Copper Alloy

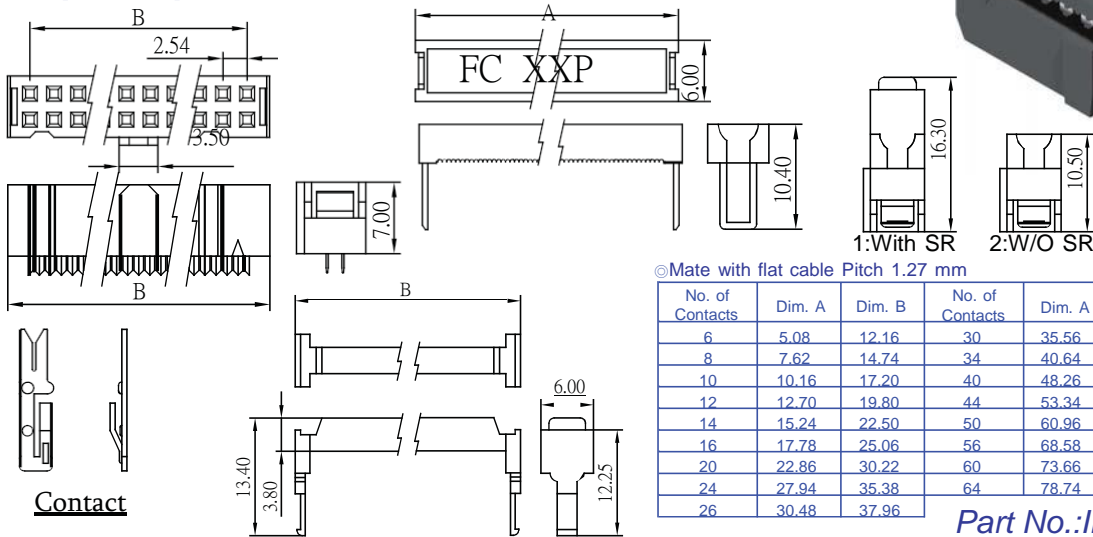

Part No.: IDC1-XX-L


IDC Socket 2.54mm With SR

Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
Standard: PBT
Terminal: Copper Alloy

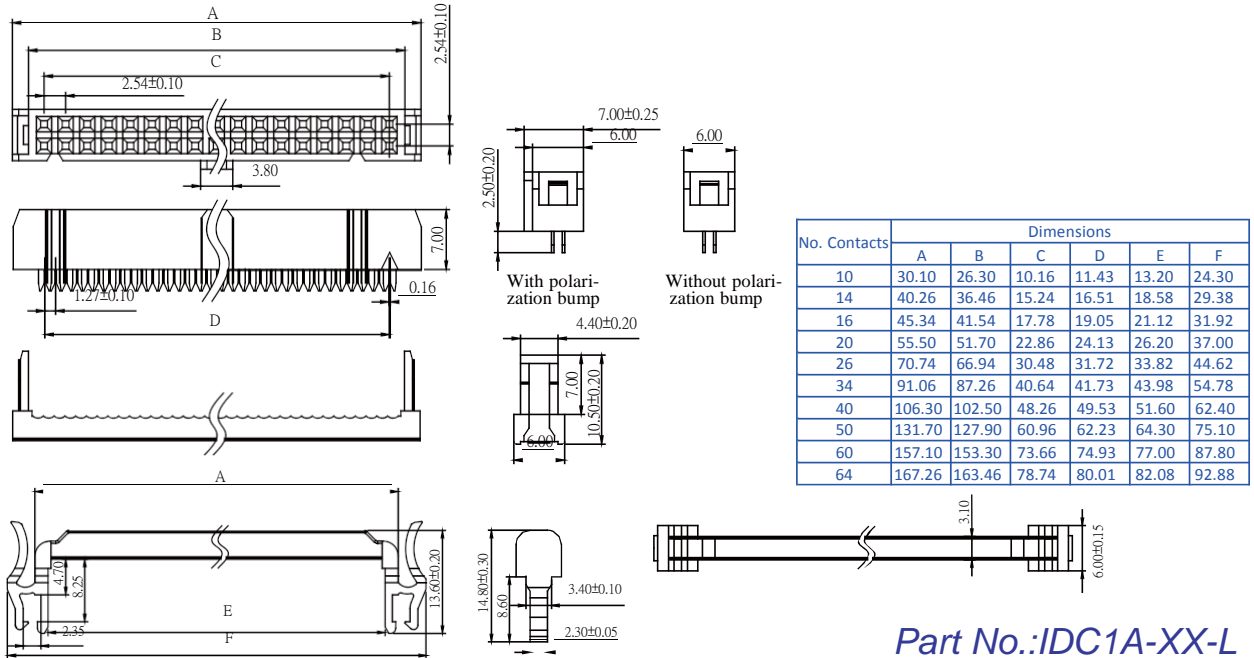

Part No.: IDC1A-XX-L

I D C 1

I D C 1 A - X X

