



IDC Socket 2.0mm

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min
Contact Resistance:30mΩ Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0
◎Standard:PBT
Terminal:Copper Alloy

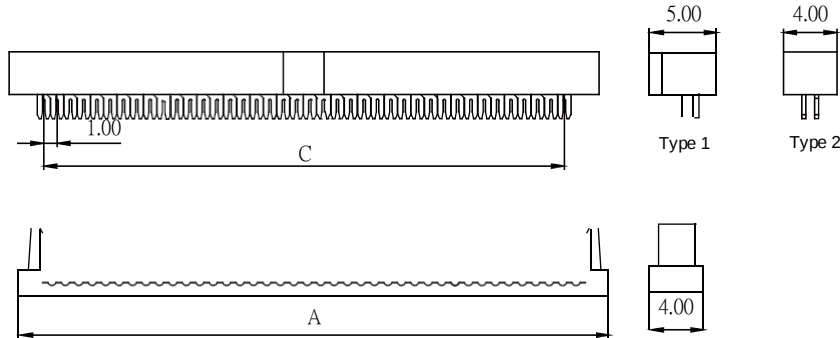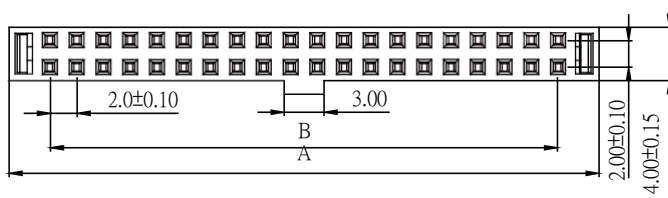

No. Contacts	Dimensions		
	A	B	C
6	10.20	4.00	5.00
8	12.20	6.00	7.00
10	14.20	8.00	9.00
12	16.20	10.00	11.00
14	18.20	12.00	13.00
16	20.20	14.00	15.00
18	22.20	16.00	17.00
20	24.20	18.00	19.00
22	26.20	20.00	21.00
24	28.20	22.00	23.00
26	30.20	24.00	25.00
30	34.20	28.00	29.00
34	38.20	32.00	33.00
36	40.20	34.00	35.00
40	44.20	38.00	39.00
44	48.20	42.00	43.00
50	54.20	48.00	49.00
60	64.20	58.00	59.00
64	68.20	62.00	63.00

Part No.:IDC2C-XX-L


IDC Socket 2.0mm

Specifications

Current Rate:2.5 AMP
Insulation Resistance:1000MΩ Min
Contact Resistance:30mΩ Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-45°C to +105°C

Material

Insulator:Polyester,UL 94V-0
◎Standard:P.B.T
Terminal:Copper Alloy

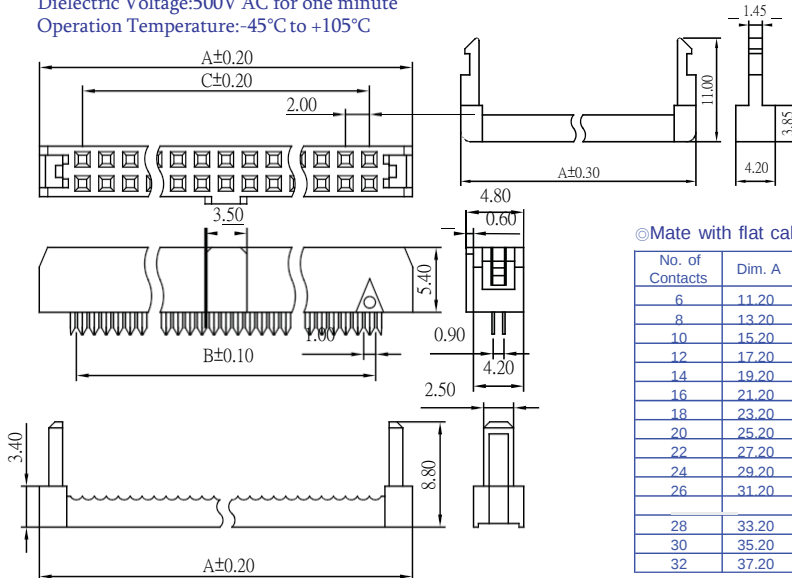

◎Mate with flat cable Pitch 1.0 mm

No. of Contacts	Dim. A	Dim. B	Dim. C	No. of Contacts	Dim. A	Dim. B	Dim. C
6	11.20	5.00	4.00	36	41.20	35.00	34.00
8	13.20	7.00	6.00	38	43.20	37.00	36.00
10	15.20	9.00	8.00	40	45.20	39.00	38.00
12	17.20	11.00	10.00	44	49.20	43.00	42.00
14	19.20	13.00	12.00	48	53.20	47.00	46.00
16	21.20	15.00	14.00	50	55.20	49.00	48.00
18	23.20	17.00	16.00	54	59.20	53.00	52.00
20	25.20	19.00	18.00	56	61.20	55.00	54.00
22	27.20	21.00	20.00	60	65.20	59.00	58.00
24	29.20	23.00	22.00	62	67.20	61.00	60.00
26	31.20	25.00	24.00	64	69.20	63.00	62.00
28	33.20	27.00	26.00	68	73.20	67.00	66.00
30	35.20	29.00	28.00	80	85.20	79.00	78.00
32	37.20	31.00	30.00	100	105.20	99.00	98.00
34	39.20	33.00	32.00				

Part No.:IDC2-XX-L

I D C 2

I D C 2 C - X X

No. of Contacts

◎S:Selective
SA:Selective 5u"
SB:Selective 10u"
SC:Selective 20u"
SD:Selective 30u"

◎B:Black Insulator
Y:Gray Insulator

◎1:With Polarization Key
2:W/O Polarization Key

◎1:With SR
2:W/O SR

L:RoHS + PBT