


## IDC Socket 2.0mm

### Specifications

Current Rate: 1 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C

### Material

Insulator: Polyester, UL 94V-0  
Standard: PBT  
Terminal: Copper Alloy

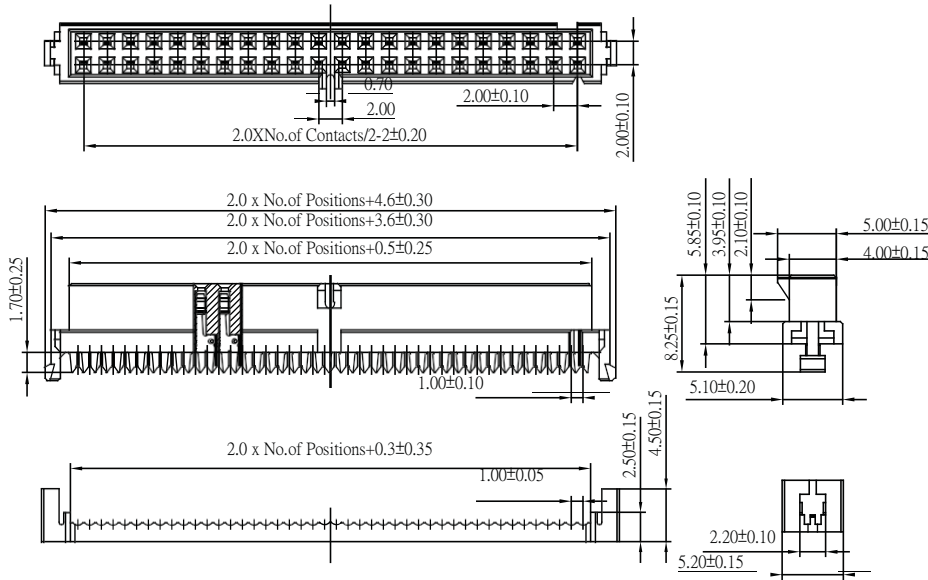

Part No.: IDC2A-XX-L


## IDC Socket 2.0mm

### Specifications

Current Rate: 1 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C

### Material

Insulator: Polyester, UL 94V-0  
Standard: PBT  
Terminal: Copper Alloy

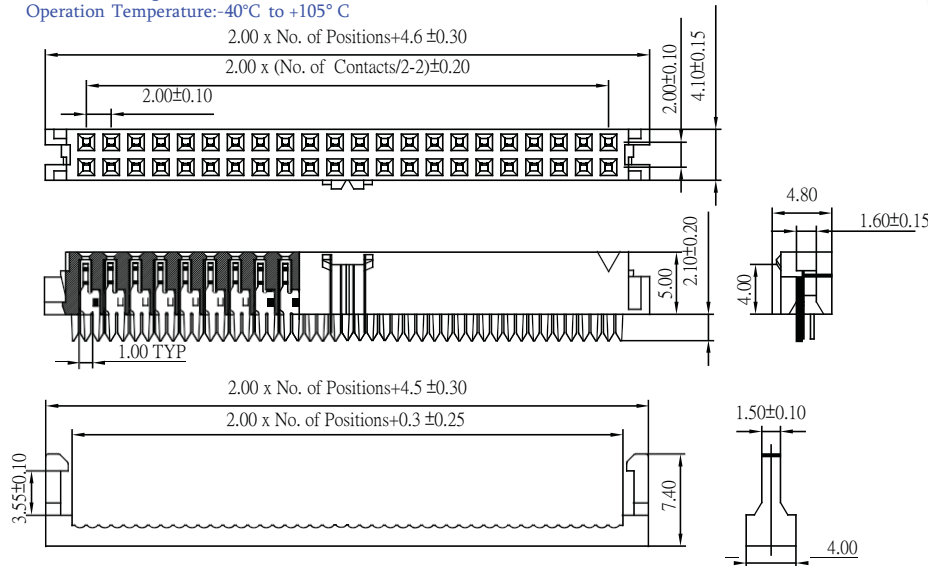

Part No.: IDC2B-XX-L

