



CONNECTORS MANUFACTURER

Modular Jack Side Entry SMT Type H=11.55 W=18.2

Material & Finish:

Housing:Glass Fiber,PBT. UL94V-0

Contact:0.35 mm Thickness Phosphor Bronze,
Gold Plating Over Nickel on Contact Area,
Tin Plating Over Nickel on Solder Area.

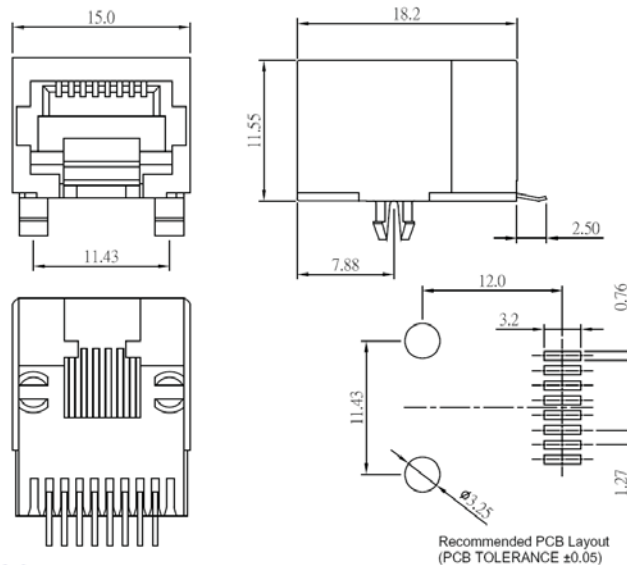

Order Information



9	6	3	-	8	P	8	C	-	X	B	-	L	
Number of Positions (8P)					Number of Contacts (8C)			Gold Plated		B:Black Insulator		L:RoHS + PBT	
						GA:Gold 6u*							
						GB:Gold 15u*							
						GC:Gold 30u*							
						GD:Gold 50u*							

Modular Jack Side Entry SMT Type H=11.55 W=18.2

Material & Finish:

Housing:Glass Fiber,Nylon 6T. UL94V-0

Contact:0.35 mm Thickness Phosphor Bronze,
Gold Plating Over Nickel on Contact Area,
Tin Plating Over Nickel on Solder Area.

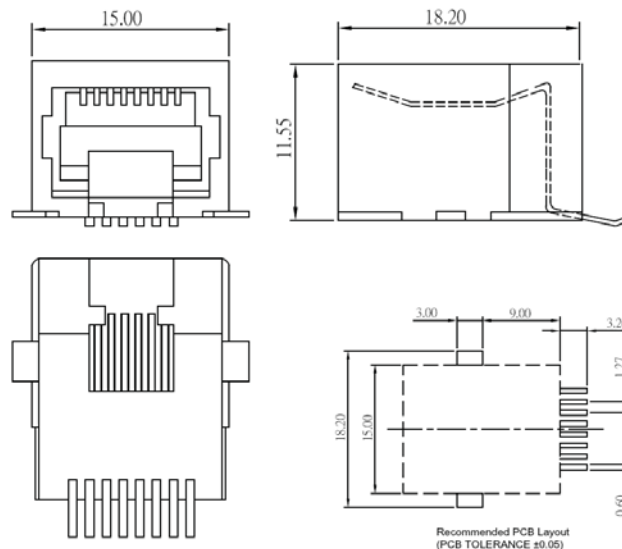

Order Information

9	6	4	-	8	P	8	C	-	X	B	-	U
Number of Positions (8P)				Number of Contacts (8C)		Gold Plated ⓈGA:Gold 6u* GB:Gold 15u* GC:Gold 30u* GD:Gold 50u*			ⓈB:Black Insulator		U:RoHS + Nylon 6T	

Modular Jack

Pb

RoHS