

Modular Jack Shielded Side Entry H=13.1 W=18.3




Material & Finish:

Housing: Glass Fiber, PBT, UL94V-0

Contact: 0.35 mm Thickness Phosphor Bronze,

Gold Plating Over Nickel on Contact Area,


Tin Plating Over Nickel on Solder Area.

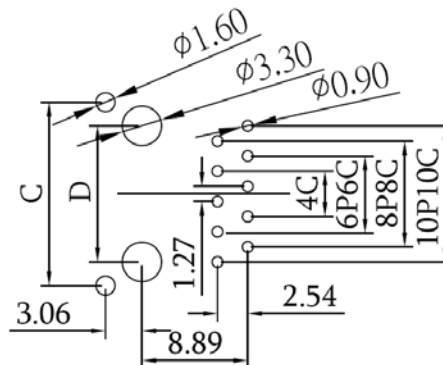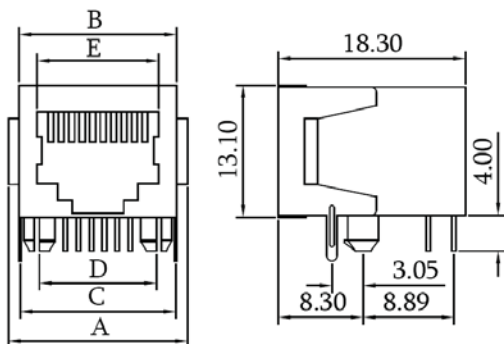

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Positions	Contacts	A	B	C	D	E
6P	2C/4C/6C	15.60	13.65	13.40	10.16	9.90
8P	8C	17.50	15.65	15.40	11.43	11.85
10P	10C	17.50	15.65	15.40	11.43	11.85

Order Information

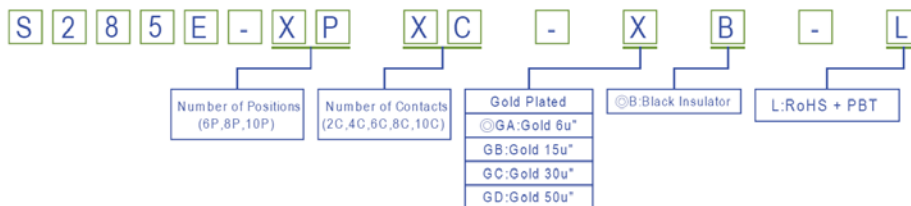

Modular Jack Shielded Side Entry H=13.1 W=21.20





Material & Finish:

Housing: Glass Fiber, PBT, UL94V-0

Contact: 0.35 mm Thickness Phosphor Bronze,

Gold Plating Over Nickel on Contact Area,

Tin Plating Over Nickel on Solder Area.

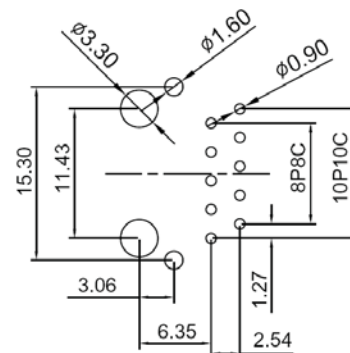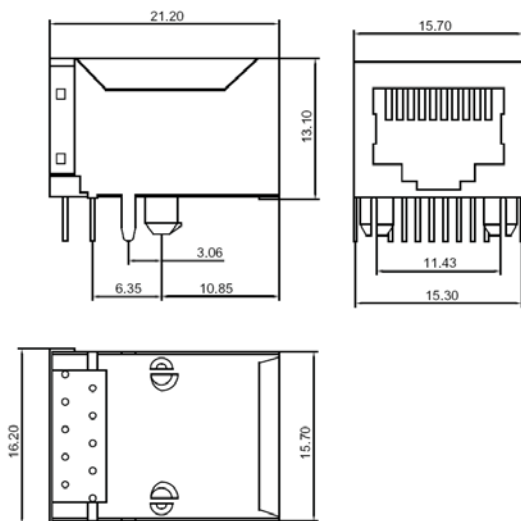

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Order Information

