SCSI Centronic Right Angle Type

SPECIFICATION

Current Rate:1 AMP
Insulation Resistance:500MΩ Min.
Contact Resistance:35mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-55°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0
◎Standard:PBT
Contact Pin:Copper Alloy



No. of Contacts	A	B	C	D	E	F
14	29.57	23.64	12.63	23.64	7.62	17.02
20	33.38	27.45	16.44	27.45	11.43	20.83
26	37.19	31.26	20.25	31.26	15.24	24.64
36	43.54	37.61	26.60	37.61	21.59	30.99
40	46.15	40.15	29.14	40.15	24.13	33.70
50	53.43	46.50	35.49	46.50	30.48	39.88
68	63.86	57.93	46.92	57.60	41.91	51.30
100	84.18	78.23	67.14	78.10	62.23	

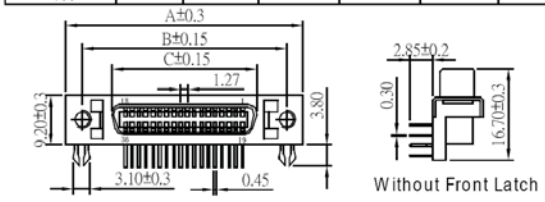

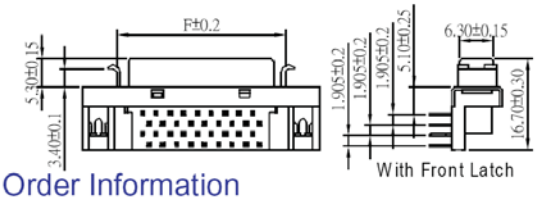





Order Information

H P C E N R - M F X X X B X X - L

- M:Metal Shell
- F:Female
- No. of Contacts
- ◎S:Selective / SA:Selective 5u" / SF:Selective 15u" / SD:Selective 30u"
- ◎B:Black Insulator
- 1:Threaded Insert 2-56 / 2:Threaded Insert 4-40 / 3:Threaded Insert M3 / ◎4:Threaded Insert M2.6
- A:With Front Latch / B:W/O Front Latch (100P W/O Front Latch)
- L:RoHS + PBT

◎:Standard Recommended

SCSI D-SUB Right Angle Type

SPECIFICATION

Current Rate:1 AMP
Insulation Resistance:500MΩ Min.
Contact Resistance:35mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-55°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0
◎Standard:PBT
Contact Pin:Copper Alloy



No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
26	37.19	31.26	19.45	31.26	15.24
50	52.43	46.50	34.70	46.50	30.48
68	63.86	57.93	46.13	57.93	41.91

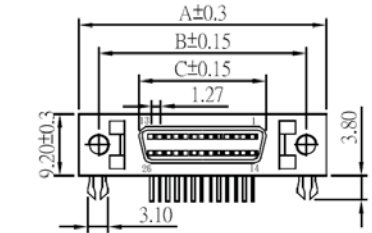

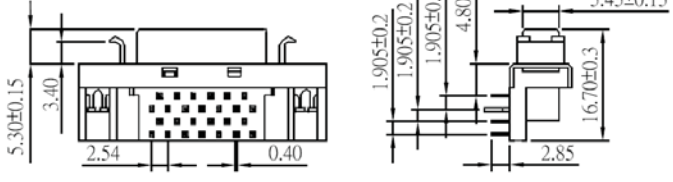





Order Information

H P D B R - M F X X X B X X - L

- R:Right Angle Type
- M:Metal Shell
- F:Female
- No. of Contacts
- ◎S:Selective / SA:Selective 5u" / SF:Selective 15u" / SD:Selective 30u"
- ◎B:Black Insulator
- 1:Threaded insert 2-56 / 2:Threaded insert 4-40 / 3:Threaded insert M3 / ◎4:Threaded insert M2.6
- A:With Front Latch / B:W/O Front Latch
- L:RoHS + PBT

◎:Standard Recommended