

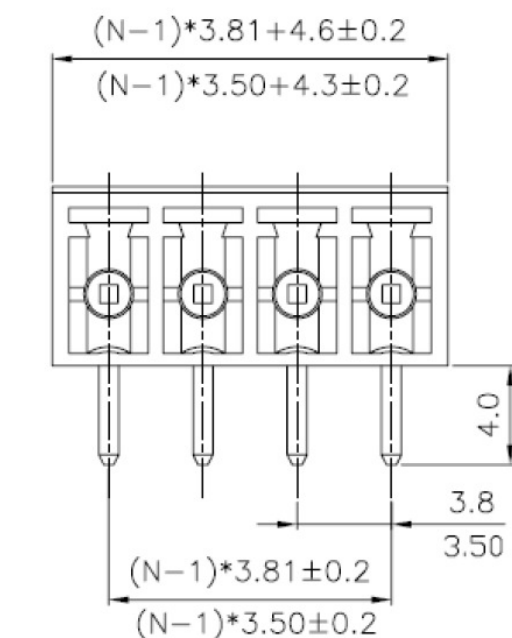




8

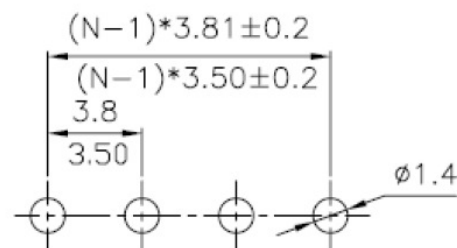

N:NUMBER OF CONTACTS

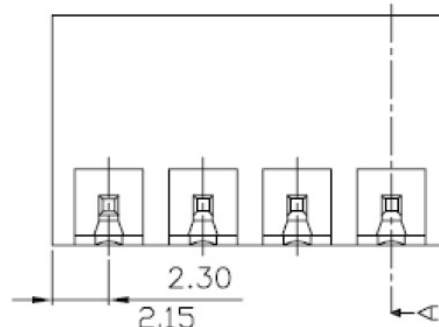

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

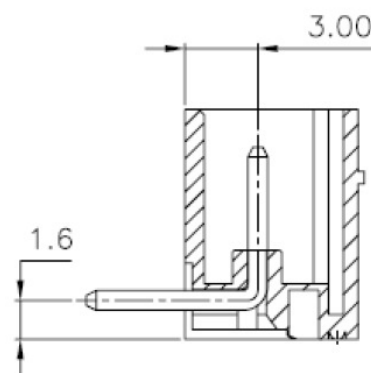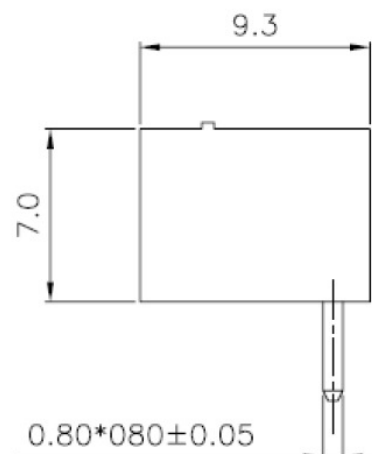

SECTION A-A

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/08/07'		

- MATERIAL
PIN HEADER : BRASS, TIN PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 8A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC2000V/1Min
- MECHANICAL
TEMP.RANGE : -40℃~+130℃
MAX SOLDERING : +250℃, FOR 5 SEC.

PRODUCT NUMBER CODE:

KF2EDG-3.5R/3.81R - X X X X X

CONTACTS TYPE
R:RIGHT ANGLE TYPE

HOUSING COLOR
B:BLACK G:GREEN

CONTACT PLATING
T:TIN O:GOLD FLASH

CONNECTOR TYPE
P:PLUG

No.OF CONTACTS
02 03 08 16

SERIES No.
F2EDG-3.5R/3.81R

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS	mm		PITCH3.50,3.81MM	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	KF2EDG-3.5R F2EDG-3.81R	
.XX	±0.25	.XX	±2°	Toptek s.r.l. Via Tubbada, 15/e - 23900 - Lecco Tel +39 0341 504 791 Fax +39 0341 967 607				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	F2EDG-3.5R /3.81R							