

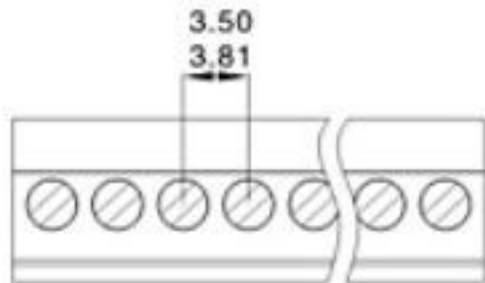


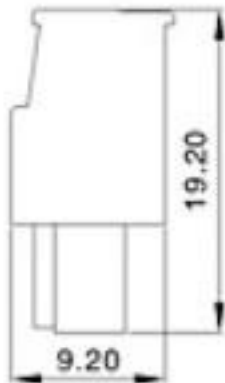


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/07/07		

- MATERIAL
 SCREWS: M2 STEEL ZINC PLATED
 WIRE GUARD: PHOSPHOR BRONZE NI PLATED
 CONTACT : BRASS NI PLATED
 HOUSING : PA66, UL94V-0
- ELECTRICAL
 RATED VOLTAGE : 300V
 RATED CURRENT : 8A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000MΩ/1000V
 WITHSTANDING VOLTAGE : AC2000V/1Min
 WIRE RANGE: 2B-16AWG 1.5mm²
- MECHANICAL
 TEMP.RANGE : -40°C ~ +105°C
 MAX SOLDERING : +250°C, FOR 5 SEC.
 TORQUE: 0.2Nm (1.71b.in)
 STRIP LENGTH : 6-7mm

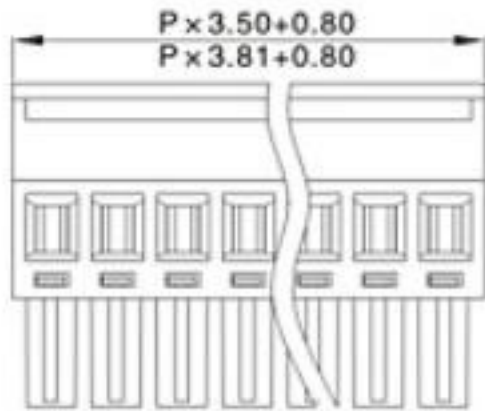

PRODUCT NUMBER CODE:

KF2EDGKA-3.50-3.81

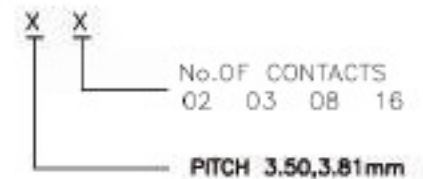

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	EURO TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS	mm	PITCH 3.50,3.81mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	
.XX	±0.25	.XX	±2°	 www.toptek-co.com			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.							