


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 07/07/07'		

- MATERIAL  
 SCREWS: M2 STEEL ZINC PLATED  
 WIRE GUARD: PHOSPHOR BRONZE NI PLATED  
 CONTACT : BRASS NI PLATED  
 HOUSING : PA66, UL94V-0
- ELECTRICAL  
 RATED VOLTAGE : 300V  
 RATED CURRENT : 8A  
 CONTACT RESISTANCE : 20mΩ  
 INSULATION RESISTANCE : 5000MΩ/1000V  
 WITHSTANDING VOLTAGE : AC2000V/1Min  
 WIRE RANGE: 28-16AWG 1.5mm<sup>±</sup>
- MECHANICAL  
 TEMP.RANGE : -40°C ~ +105°C  
 MAX SOLDERING : +250°C, FOR 5 SEC.  
 TORQUE: 0.2Nm (1.71b.in)  
 STRIP LENGTH : 6-7mm

PRODUCT NUMBER CODE:

KF2EDGKB-3.50-3.81

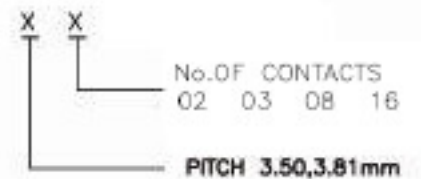

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊙-↖	TITLE	EURO TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS	mm		PITCH 3.50,3.81mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES		
.XX	±0.25	.XX	±2°			 <a href="http://www.toptek-co.com">www.toptek-co.com</a>		
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.								