




MMCX Conn. Series

RoHS
2002/95/EC

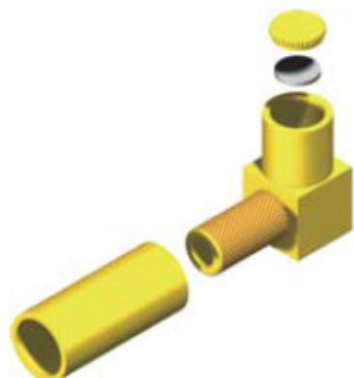

Part No.: MMCX004-F  GW-L
5:50 Ω 7:75 Ω

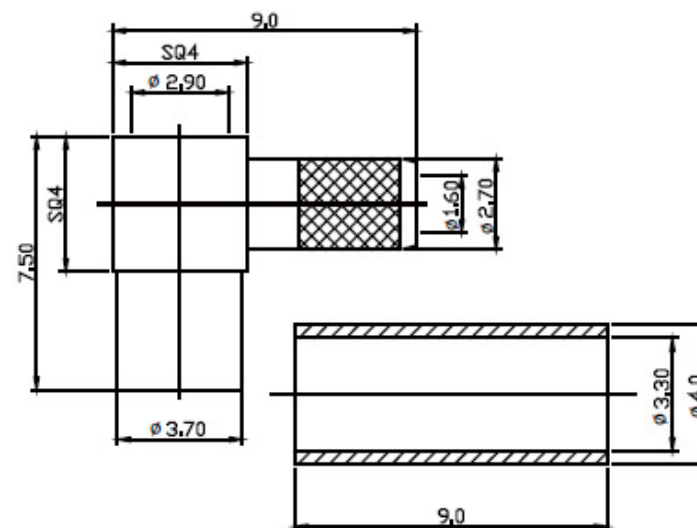

7	DIELECTRIC	DELIN		1
6	STOPPLE	BRASS	GOLD	1
5	FERRULR	BRASS	GOLD	1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50 OHM
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 VRMS MIN
VOLTAGE RATING	170 VRMS MAX.
CONTACT	INNER CONDUCTOR
RESISTANCE	OUTER CONDUCTOR
	= 5.0 MILLIOHMS
	= 2.5 MILLIOHMS

TOPTEK
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com