



in-Female Header 2.54 mm



RoHS

Pin Header 2.54mm 1 Row H=2.5mm C Type

Specifications

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C




Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

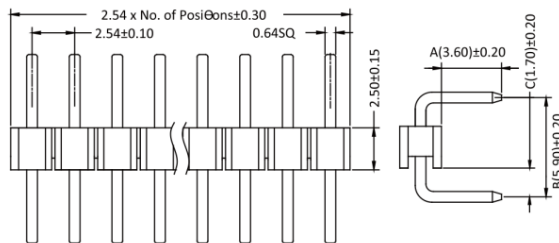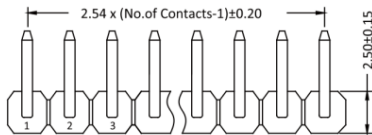

Part No.:PH1C25-1XX-L/U

ORDER INFORMATION

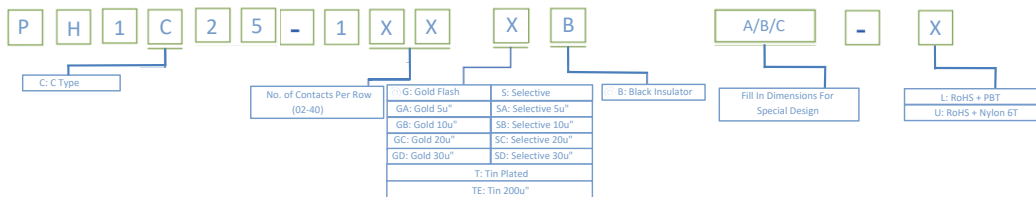

©:Standard Recommend

