



in-Female Header 2.54 mm



RoHS

Pin Header 2.54mm 3 Row H=1.7mm Stack Straight

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute



Operation Temperature:-40°C to +105°C

Material



Insulator:Hi-Temp. Thermoplastic, UL 94V-0

Terminal:Copper Alloy

Plating:Gold Plated

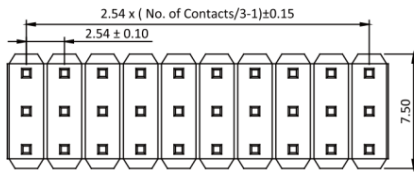


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

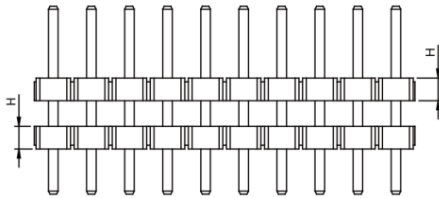

Part No.:PH1D17-3XX-L/U

ORDER INFORMATION

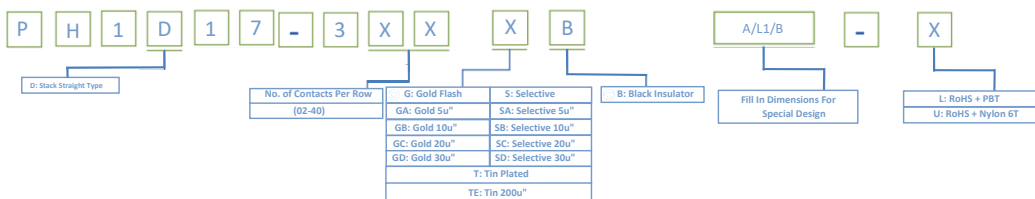

©:Standard Recommend

