

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Pin Header 2.54mm 3 Row H=2.5mm Stack Straight

Specifications



Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

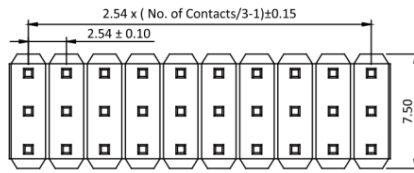


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

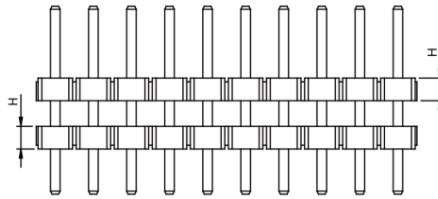

Part No.: PH1D25-3XX-L/U

ORDER INFORMATION

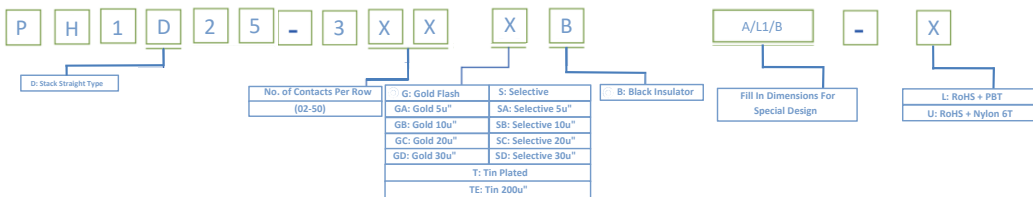

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS