

PIN HEADER 2.54

Pin Header 2.54mm 2 Row H=2.5/1.7/1.5mm Stack Straight Type

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

Material


Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated

www.toptek-co.com







ORDER INFORMATION

P	H	1	D	2	5	-	2	X	X	X	X	X	PA/PB/PC	X	-	X	
				PD				No.of Pins Pr Row		Insulator Material Option		PA/ PB/ PC= Pin Lenght				1=Type 01 2=Type 02	
				25=2.5mm 17=1.7mm 15=1.5mm				2x40		A=BK-PBT B=BK-PA66 C=BK-PA6T D=BKPA46 F=BK-LCP		Contact Plating G0=Gold Flash G2=5U" Gold G3=10U" Gold G4=15U" Gold G5=30U" Gold S0=Gold Flash/Tin SN=Tin				Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap	

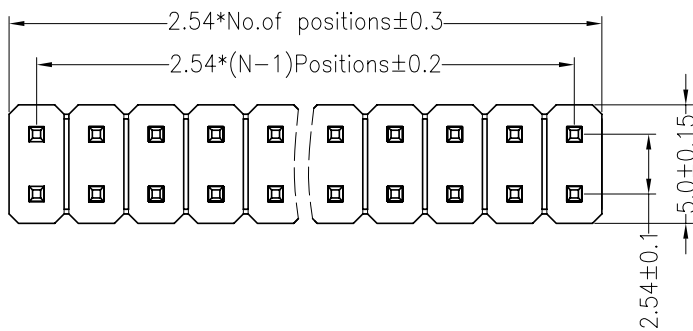

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

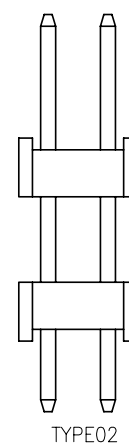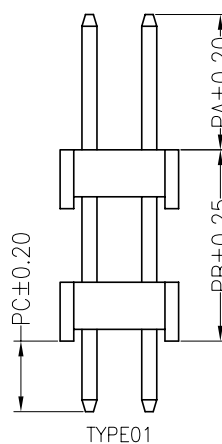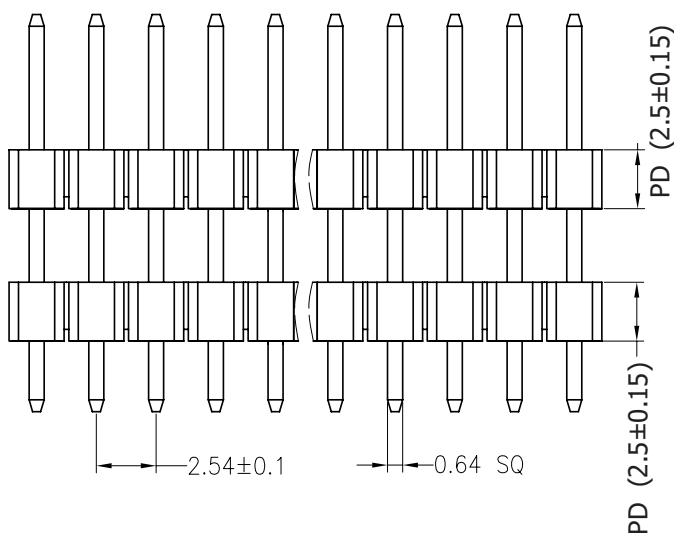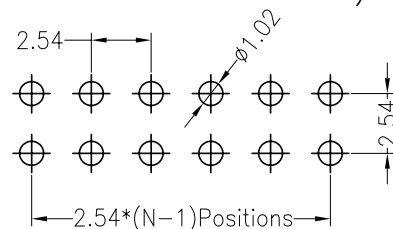

PD
2.50mm
1.70mm
1.50mm

ITEM	PA	PB	PC
Standard	6.00	XX	3.00
Alternate			