

CONNECTOR MANUFACTURERS




Pin Header 2.54mm 1 Row H=2.5mm Stack Right Angle Type

Specifications


Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated




Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

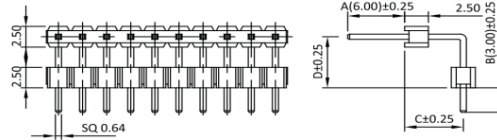

Part No.: PH1DR-1XX-L/U

ORDER INFORMATION

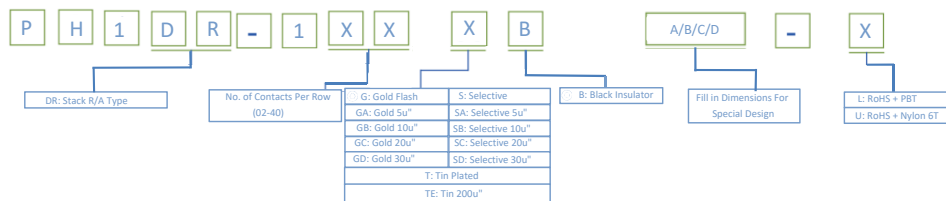

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS