



# Pin-Female Header 2.54 mm



ROHS

## Pin Header 2.54mm 2 Row H=1.5mm Kinked Type

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER



### Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute





Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0


Terminal:Copper Alloy

Plating:Gold Plated

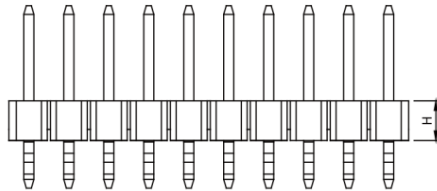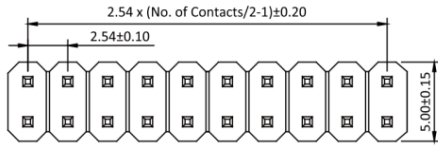

Part No.:PH1K15-2XX-L/U

## ORDER INFORMATION

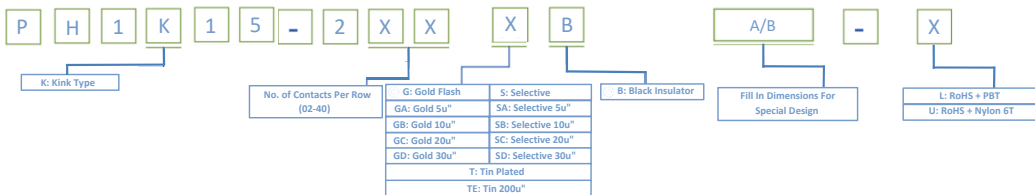

©:Standard Recommend

