

CONNECTOR MANUFACTURERS






Pin Header 2.54mm 2 Row H=2.5mm SMT Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

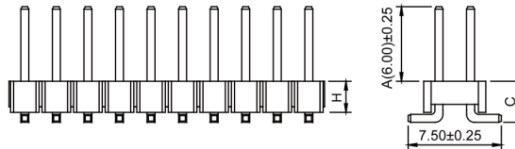

Part No.: PH1M25-2XX-U

ORDER INFORMATION

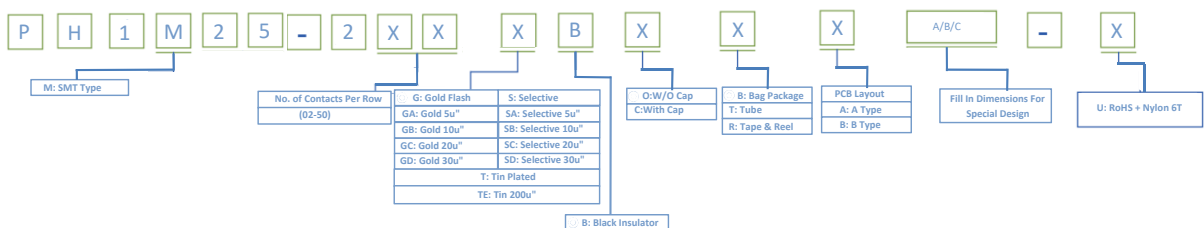

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS