

PIN HEADER 2.54

Pin Header 2.54mm 2 Row H=2.5/1.7/1.5mm SMT Type

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS



Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C



Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated




www.toptek-co.com



ORDER INFORMATION

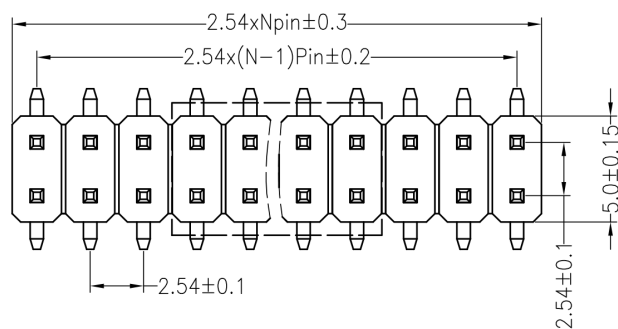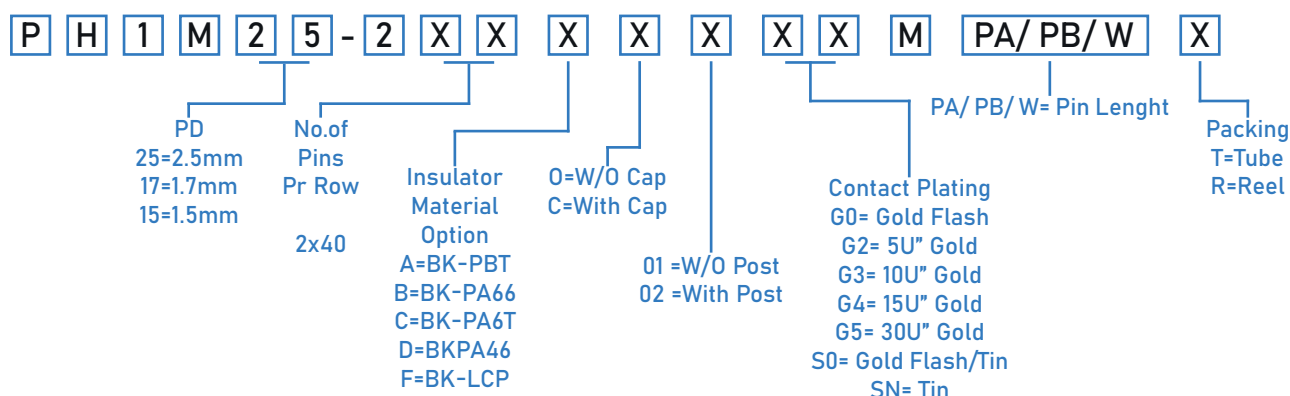

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

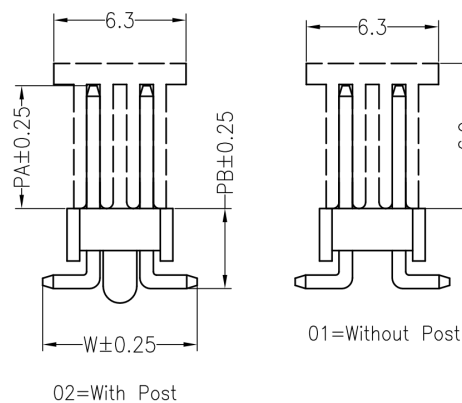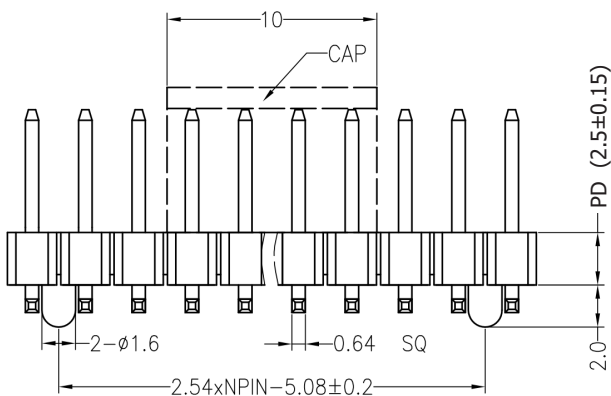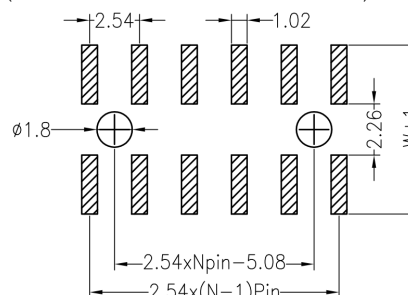

PD
2.5mm
1.7mm
1.5mm

ITEM	PA	PB	W
Standard	6.00	3.20	7.50
Alternate			