

# P in-Female Header 2.54 mm



ROHS





## Pin Header 2.54mm 2 Row H=4.3mm Right Angle Type

TOPTTEK®  
HARDWARE ELECTRONIC MANUFACTURER

Specifications  
 Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C


Material  
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

www.toptek-co.com

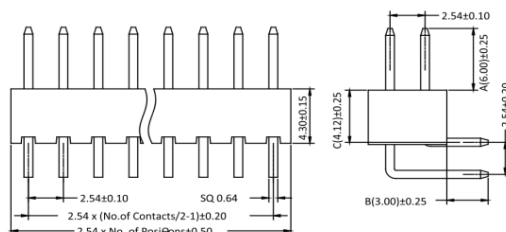

Part No.:PH1R43-2XX-L/U

## ORDER INFORMATION

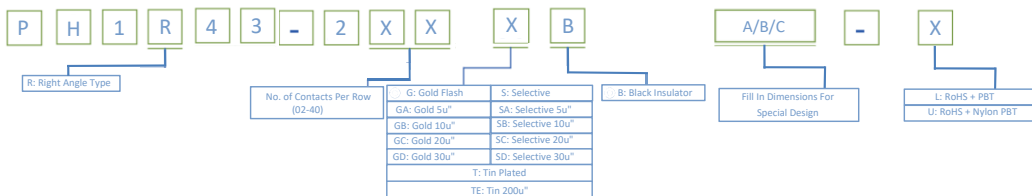

©:Standard Recommend

