

CONNECTOR MANUFACTURERS





Pin Header 2.54mm 2 Row H=1.5mm Right Angle Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material


Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

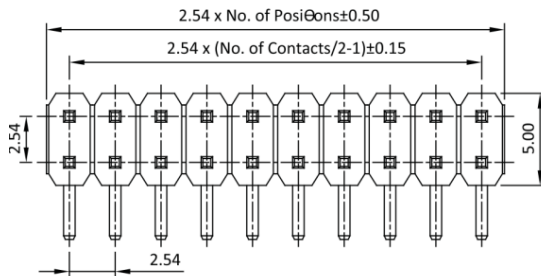

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

©: Standard Dimensions


Dimensions		
A	B	C
3.50	3.30	3.90
6.00	3.00	3.90
9.90	3.30	3.90

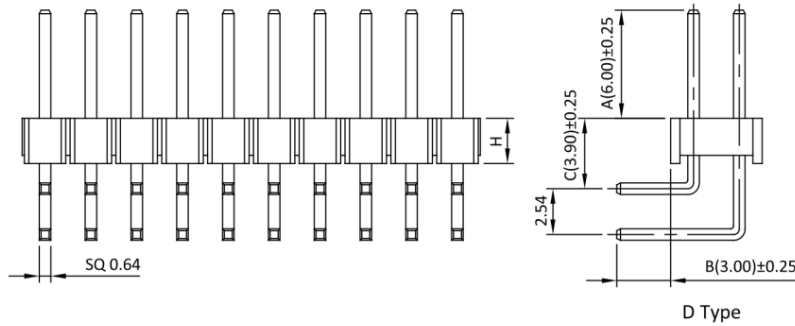

D Type

Part No.: PH1RD15-2XX-L/U

ORDER INFORMATION

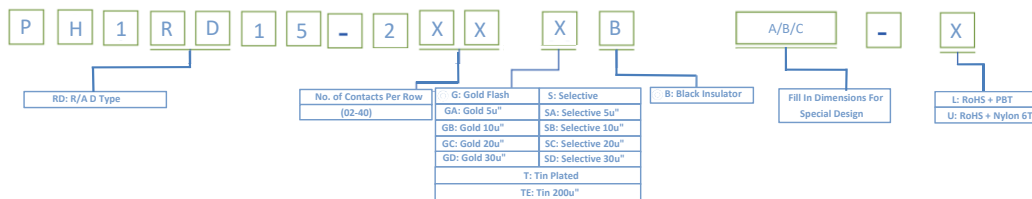

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS