

# CONNECTOR MANUFACTURERS




## Pin Header 2.54mm 1 Row H=2.5mm Right Angle Type

### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material



Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

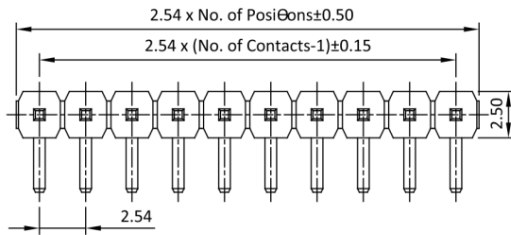

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)


©: Standard Dimensions

Dimensions		
A	B	C
3.50	3.30	3.90
6.00	3.00	3.90
9.90	3.30	3.90

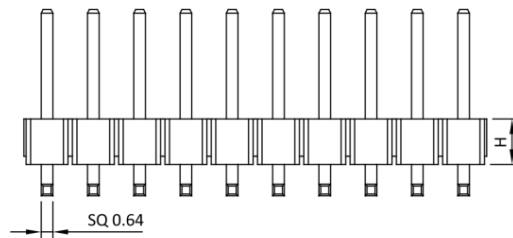

Part No.: PH1RD25-1XX-L/U

## ORDER INFORMATION

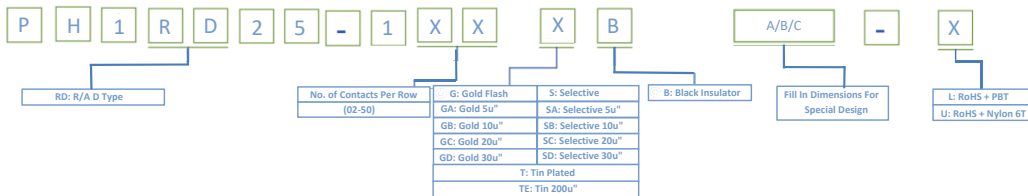

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS