

PIN HEADER 2.54

Pin Header 2.54mm 1 Row H=2.5/1.7/1.5mm Right Angle Type

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS 2002/95/EC

Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ | Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C



Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated





D Type

ORDER INFORMATION

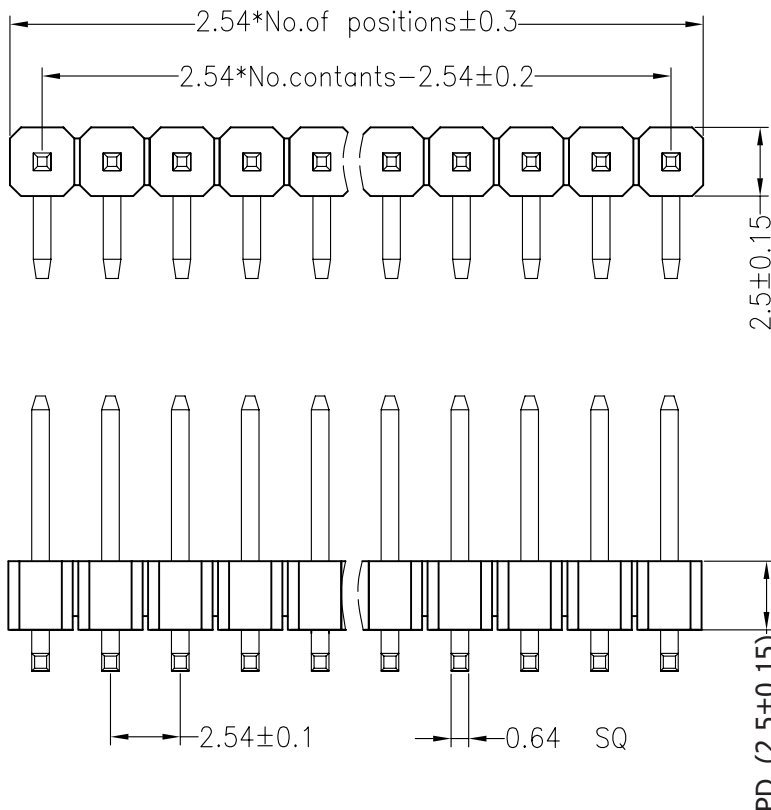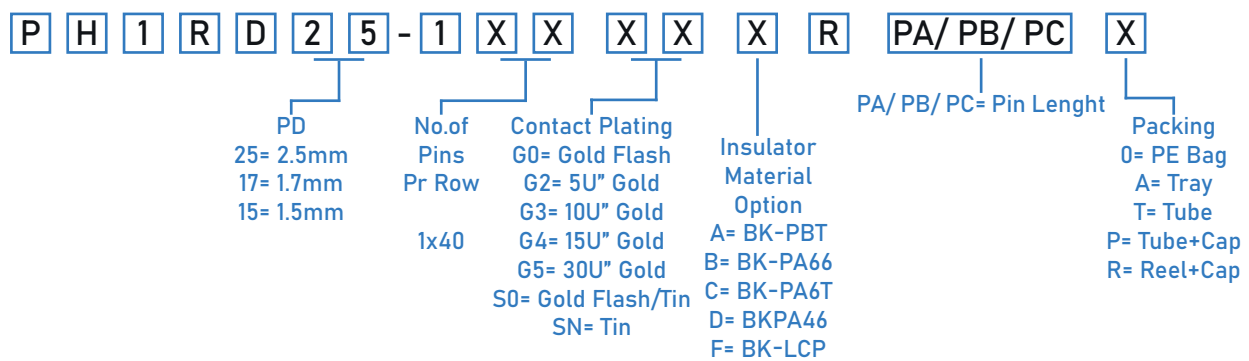

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

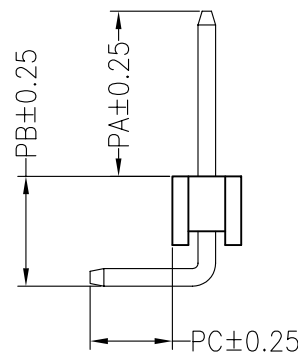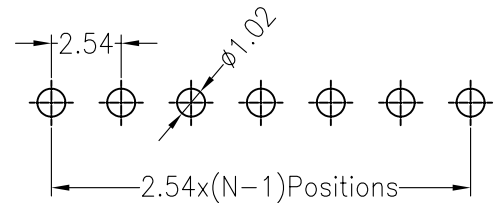

PD
2.50mm
1.70mm
1.50mm

ITEM	PA	PB	PC
Standard	6.00	4.22	3.00
Alternate			