

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com






Pin Header 2.54mm 3 Row H=2.5mm Stack Right Angle

Specifications

Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated



Part No.: PH1RDD-3XX-L/U

ORDER INFORMATION

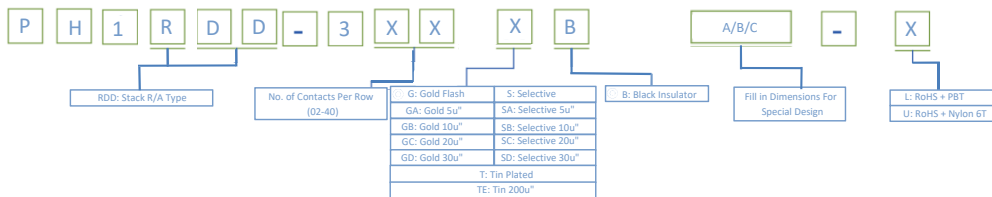

©: Standard Recommend

Pin-Female Header 2.54 mm



ROHS