

PIN HEADER 2.54

Pin Header 2.54mm 2 Row H=2.5mm Stack Right Angle Type

TOPTTEK®
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

Material



Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated

www.toptek-co.com





ORDER INFORMATION

P	H	1	R	D	D	-	2	X	X	X	X	X	A/B/C	X
							No. of Pins Pr Row	Insulator Material Option		Contact Plating			A/ B/ C= Pin Length	Packing
							2x40	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BKPA46 F=BK-LCP		G0=Gold Flash G2=5U" Gold G3=10U" Gold G4=15U" Gold G5=30U" Gold S0=Gold Flash/Tin SN=Tin				0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap

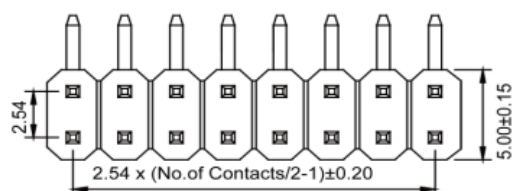

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

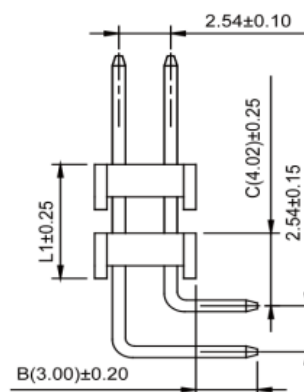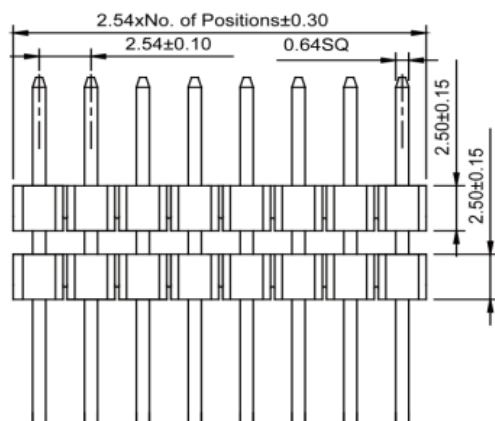

ITEM	A	B	C
Standard	6.00	3.00	4.02
Alternate			