



Pin Header 2.54mm 1 Row H=2.5mm Eccentric Right Angle




Specifications
 Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

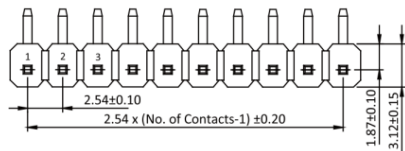


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

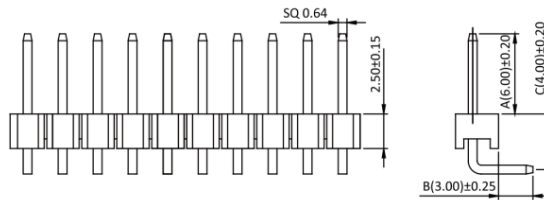

Part No.: PH1RDL25-1XX-L/U

ORDER INFORMATION

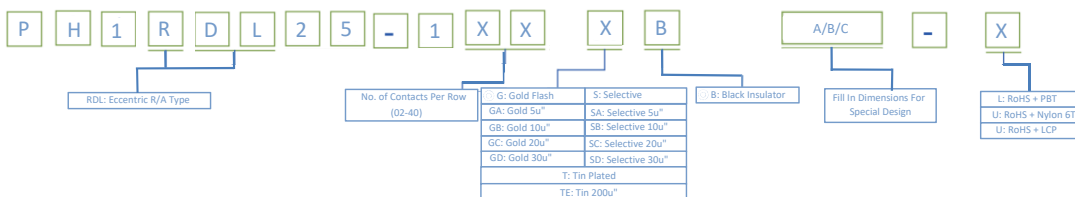

©: Standard Recommend

