

P in-Female Header 2.54 mm



Pin Header 2.54mm 1 Row H=1.5mm Straight Type




Specifications

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C

Material



Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

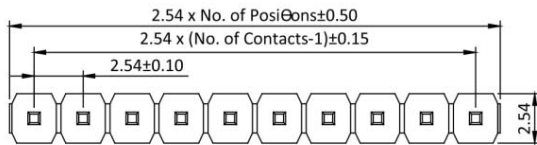

Recommended PCB Layout
(PCB TOLERANCE ±0.05)


Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

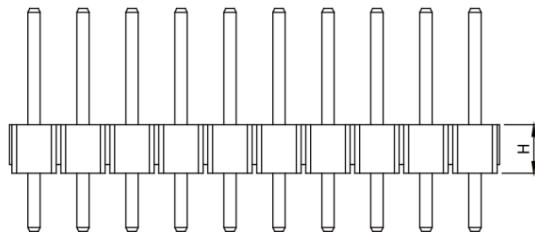

Part No.:PH1S15-1XX-U

ORDER INFORMATION

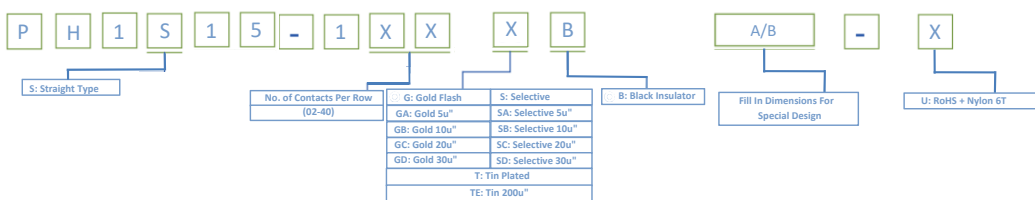

Standard Recommend