

# CONNECTOR MANUFACTURERS





## Pin Header 2.54mm 2 Row H=1.7mm Straight Type

### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C



### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

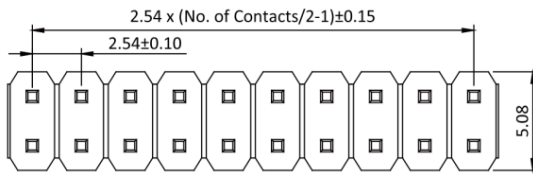


⊙: Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

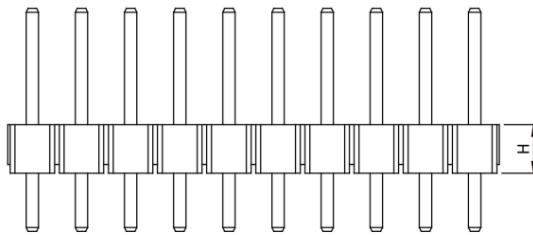

Part No.: PH1S17-2XX-U

## ORDER INFORMATION

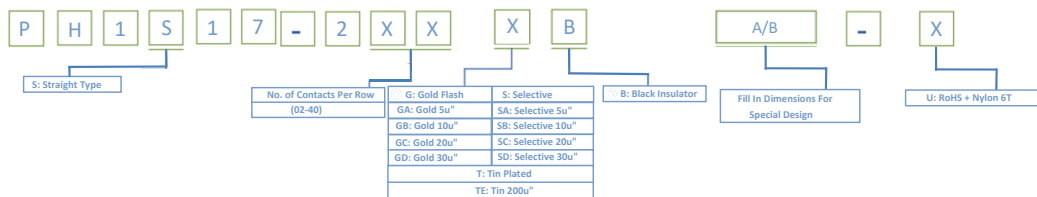

⊙: Standard Recommend

