

CONNECTOR MANUFACTURERS





Pin Header 2.54mm 3 Row H=1.7mm Straight Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material



Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

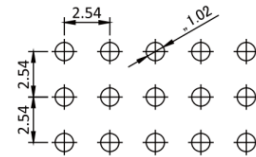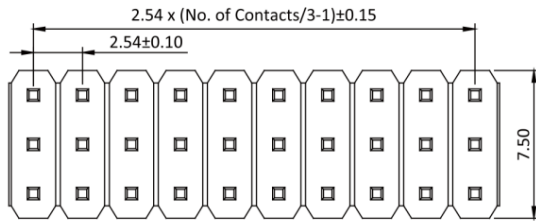

Recommended PCB Layout
(PCB TOLERANCE ±0.05)


Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

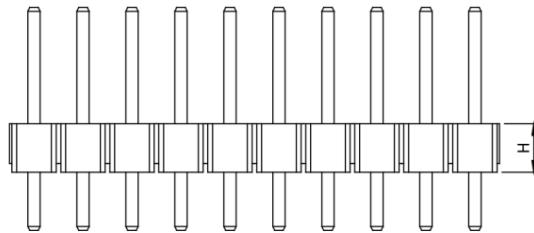

ORDER INFORMATION

Part No.: PH1S17-3XX-U

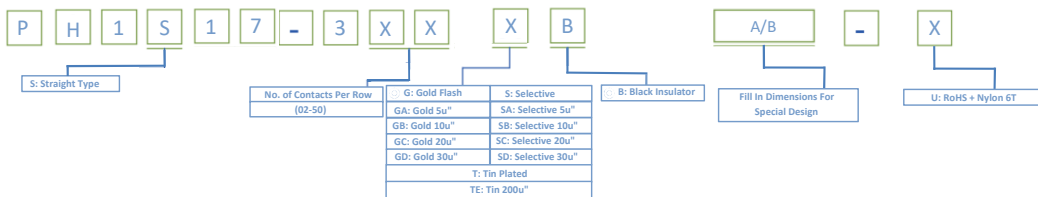

Standard Recommend

Pin-Female Header 2.54 mm



RoHS