

P in-Female Header 2.54 mm



ROHS

Pin Header 2.54mm 2 Row H=2.5mm Straight Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER





Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material



Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

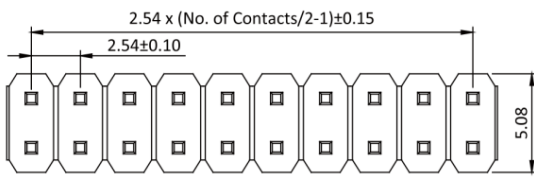

Recommended PCB Layout
(PCB TOLERANCE ±0.05)


©:Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

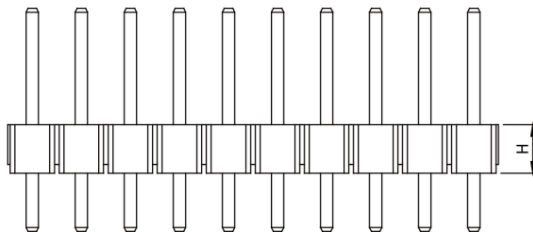

Part No.: PH1S25-2XX-L/U

ORDER INFORMATION

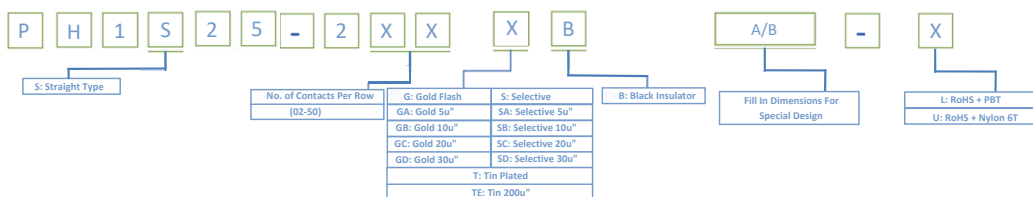

©:Standard Recommend

