

PIN HEADER 2.54

Pin Header 2.54mm 2 Row H=2.5/1.7/1.5mm Straight Type

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS



Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0 | Terminal: Copper Alloy | Plating: Gold Plated




www.toptek-co.com



ORDER INFORMATION

P	H	1	S	2	5	-	2	X	X	X	N	X	X	S	PA/PC	X
				PD										PA/PC= Pin Length		Packing
				25= 2.5mm 17= 1.7mm 15= 1.5mm						No. of Pins Pr Row						0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap
										2x40						
										Insulator Material Option						
										A= BK-PBT B= BK-PA66 C= BK-PA6T D= BKPA46 F= BK-LCP						
												Contact Plating				
												G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/Tin SN= Tin				

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

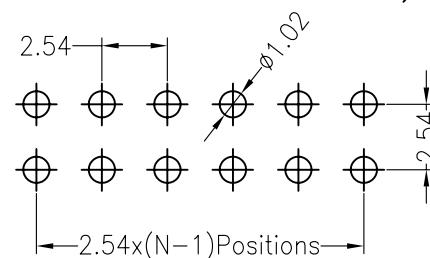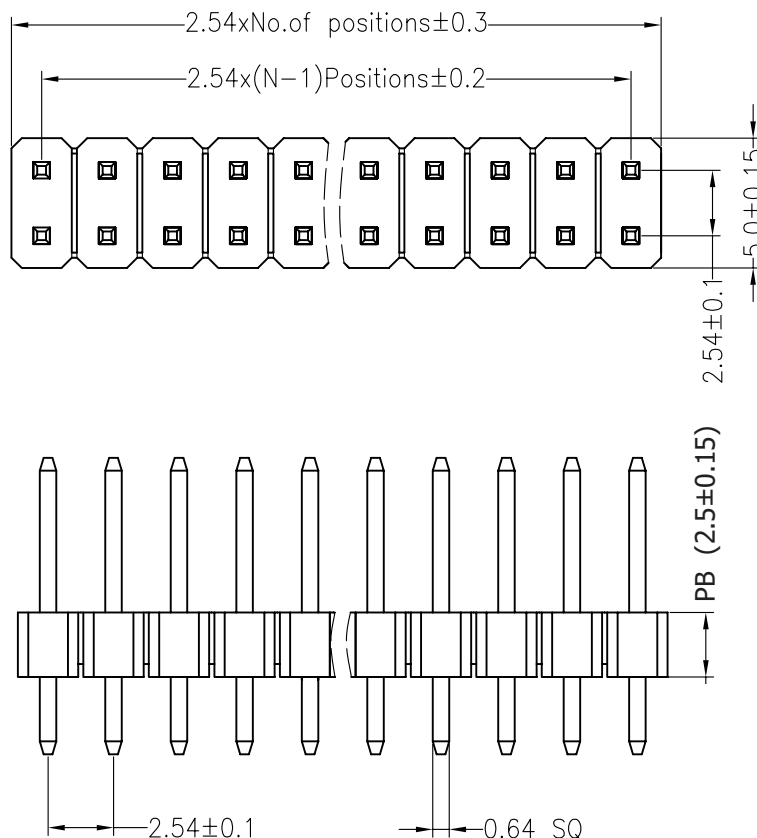

PB
2.50mm
1.70mm
1.50mm

ITEM	PA	PC
Standard	6.00	3.00
Alternate		